ECT
Engineering College of Technology.

The Basics of Power Electronics

Watch Webinar Recording Here

Dr. Walid Issa I ECT Programme Leader



UKPRN: 10089771

Event Conduct



Please keep discussion lawful and respectful; follow the moderator’s directions. Do not share illegal or abusive content. Recording is not permitted unless authorised. Breaches may lead to removal and referral under ECT policies.

About ECT

We are dedicated to ensuring that you receive a world-class education and gain skills that you can immediately apply in the workforce.



Engineering Specialists

ECT - affiliated to the well-established Engineering Institute of Technology (EIT) - is an engineering education specialist. ECT delivers bachelor's and master's degrees.



Industry-Driven Programs

Our programs are designed by industry experts, ensuring you graduate with cutting-edge skills that are valued by employers. Our program content remains current with rapidly changing technology and industry developments.



UK Recognised Education

ECT is OfS registered and accredited, meeting the Office for Students' requirements for course quality, academic standards, student support and student protection.



Lecturers and Instructors

Our teachers are subject specialists with industry experience and the requisite academic qualifications. The online platform allows ECT to source them from a large, global pool of expertise.



Unique Delivery Model


We deliver our programmes via a unique delivery methodology that makes use of live and interactive tutorials, an international pool of expert lecturers, dedicated learning support officers, hands-on workshops and state-of-the-art remote labs connected to real equipment, and simulation software.


UKPRN: 10089771

What is Power Electronics ?

The term power electronics refers to solid-state electronic devices used for the conversion and control of electric power.



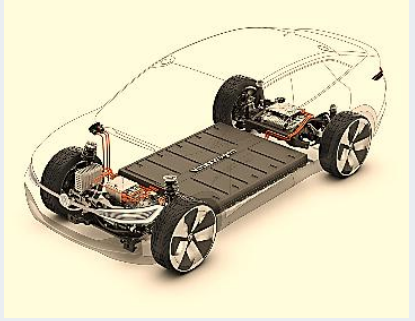

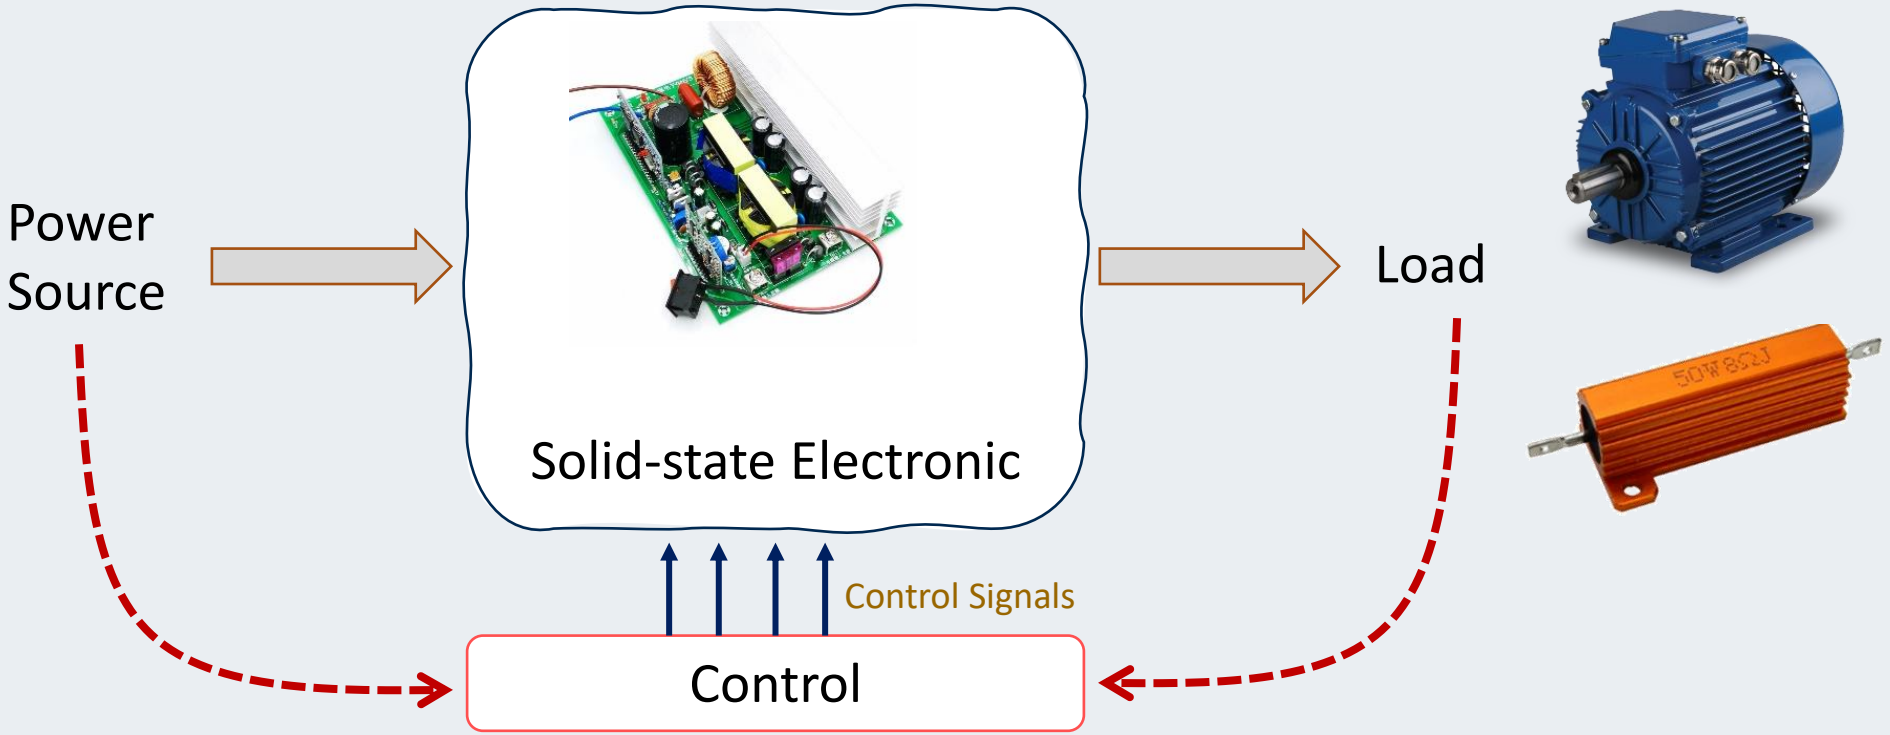


Power Electronics is a field which combines Electric Power, Electronics and Control

What does Power Electronics do ?

Efficient, flexible control and conversion of electrical energy

AC sources: single phase or three phase AC

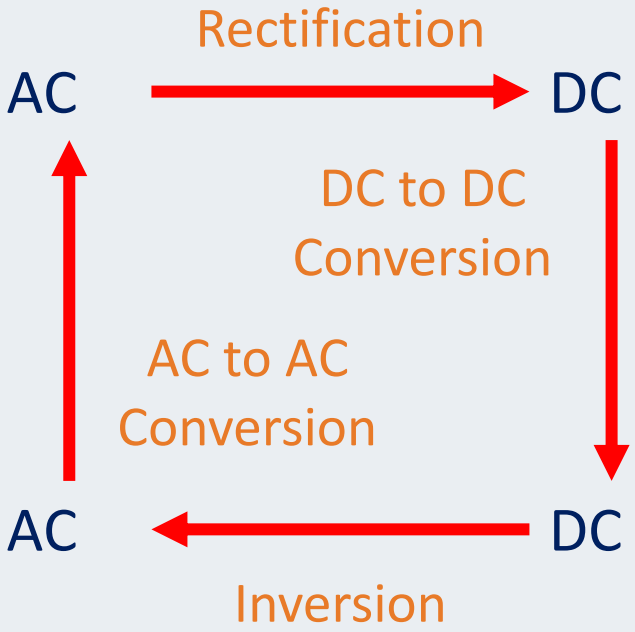

DC loads : heater, lamp, DC motor


DC sources : batteries, solar panel, power supply

AC loads: machines, power transmission and distribution systems


DC loads :
electronic circuits, machines

Power Electronic Applications

- **Commercial/Industrial Applications**
  Heating Systems Ventilating, Air Conditioners, Central Refrigeration, Lighting, Computers and Office equipment, Uninterruptible Power Supplies (UPS), Elevators, and Emergency Lamps.

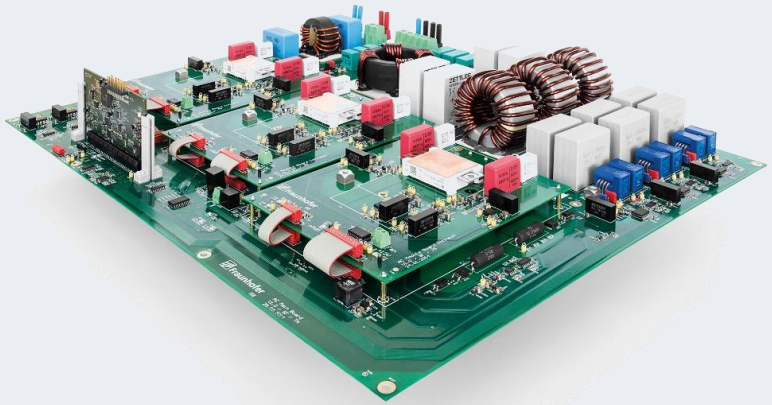



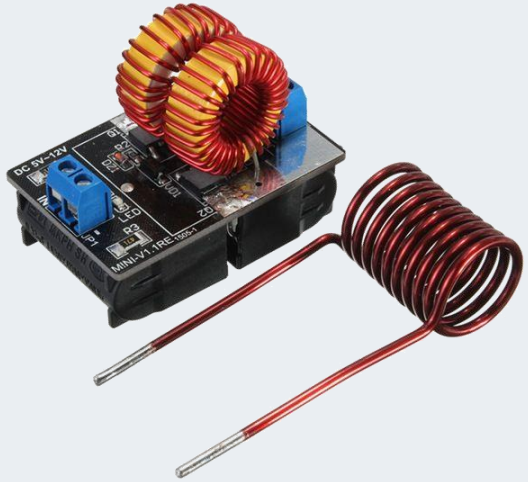

- **Domestic Applications**
  Cooking Equipment, Lighting, Heating, Air Conditioners, Refrigerators & Freezers, Personal Computers, Entertainment Equipment, UPS


Power Electronic Applications

- **Aerospace Applications**
  Space shuttle power supply systems, satellite power systems, aircraft power systems.


- **Telecommunications**
  Battery chargers, power supplies (DC and UPS), mobile cell phone battery chargers.

- **Transportation**
  Traction control of electric vehicles, battery chargers for electric vehicles, electric locomotives, street cars, trolley buses, automobile electronics including engine controls.

The Market

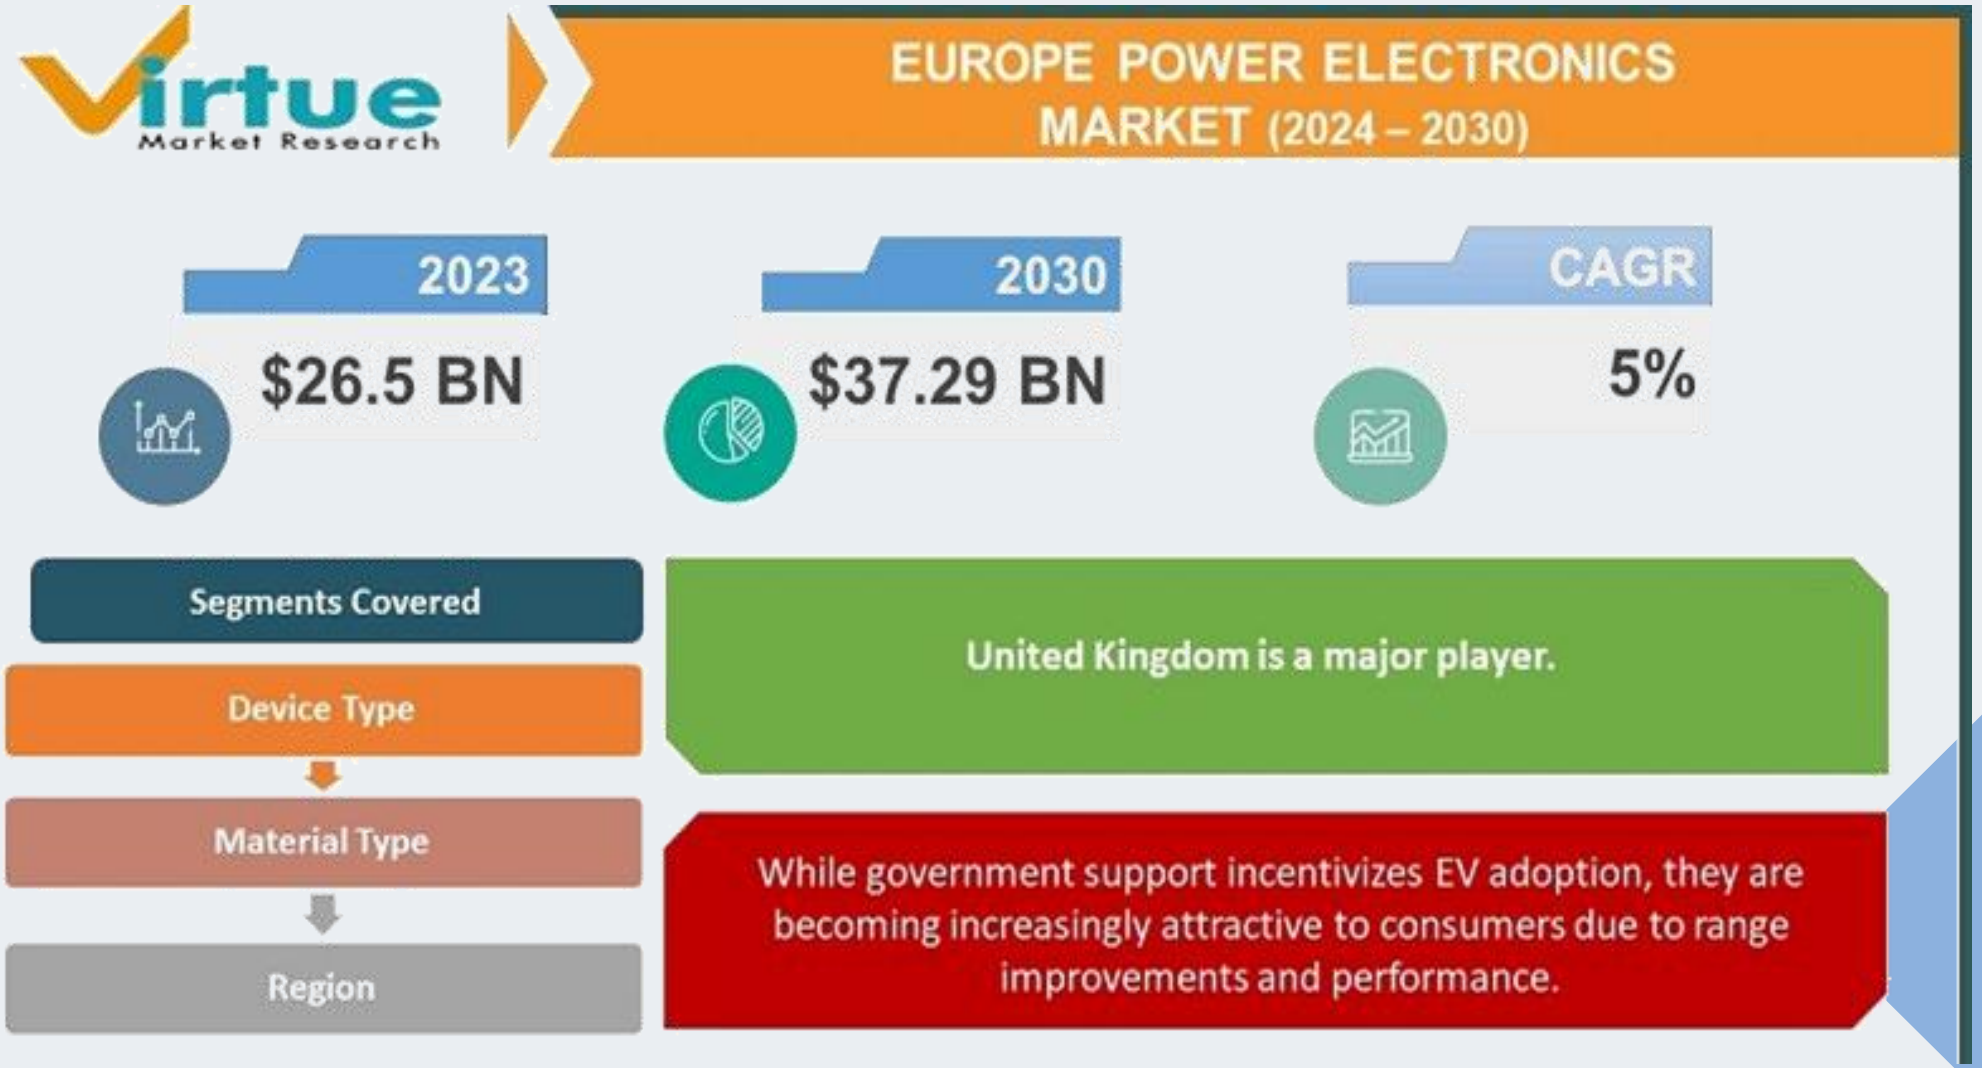
Virtue
Market Research
EUROPE POWER ELECTRONICS MARKET (2024 – 2030)
2023
$26.5 BN
2030
$37.29 BN
CAGR
5%
Segments Covered
Device Type
Material Type
Region
United Kingdom is a major player.
While government support incentivizes EV adoption, they are becoming increasingly attractive to consumers due to range improvements and performance.

The Market

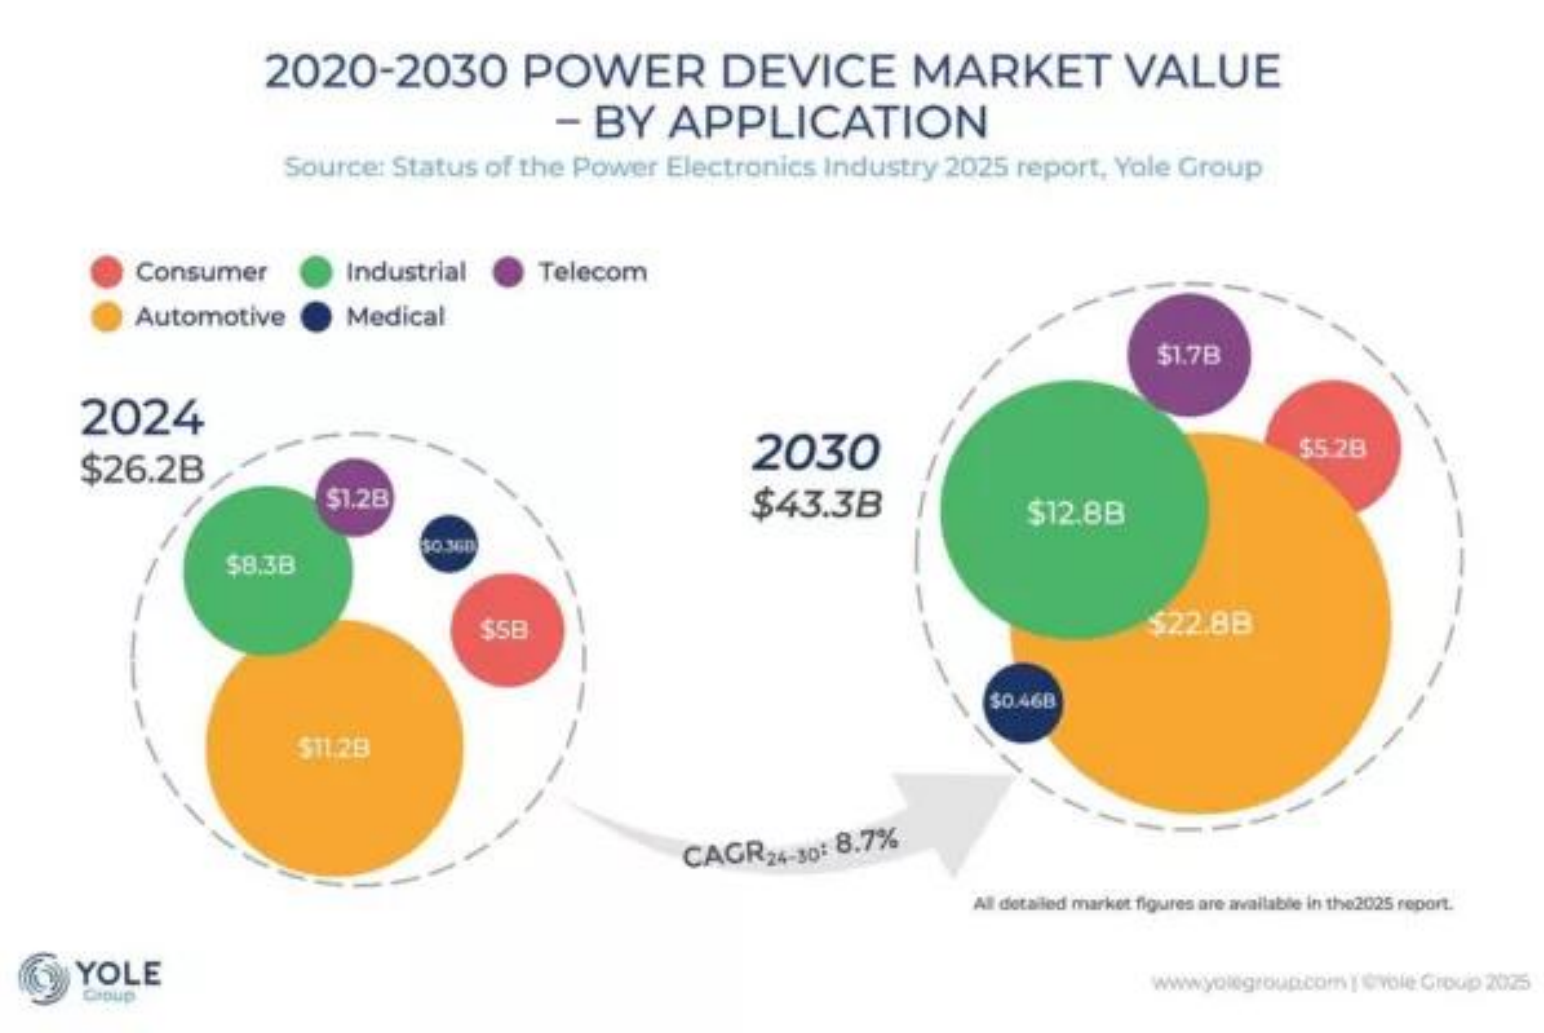
2020-2030 POWER DEVICE MARKET VALUE – BY APPLICATION
Source: Status of the Power Electronics Industry 2025 report, Yole Group
Consumer
Industrial
Telecom
Automotive
Medical
2024
$26.2B
$1.2B
$8.3B
$0.36B
$5B
$11.2B
2030
$43.3B
$1.7B
$5.2B
$12.8B
$22.8B
$0.46B
CAGR24-30: 8.7%
All detailed market figures are available in the2025 report.
YOLE Group
www.yolegroup.com | ©Yole Group 2025

The Market

Job title:	Power Electronics Engineer (Systems Level Inverters & Drives)
Job type:	Permanent
Emp type:	Full-time
Functional Expertise:	Hardware Engineering
Skills:	Power Electronics, Inverters, DC-DC, AC-DC
Salary type:	Annual
Salary:	GBP £60,000.00
Location:	Woking
Job published:	20-01-2026

Qualifications


- Bachelor's or Master's degree in Electrical Engineering, Power Electronics, or equivalent field.
- Minimum 5+ years of experience in design and development of power conversion systems, with emphasis on inverters and motor drives.
- Deep understanding of topologies (e.g., three-phase inverters, DC/DC converters, multilevel inverters) and related control strategies (FOC, PWM, DTC, etc.).
- Experience with SiC and GaN-based power devices and associated gate drive circuits.
- Strong analytical and modelling skills using tools like MATLAB/Simulink, PSIM, or PLECS.
- Familiarity with EMI/EMC design principles, thermal design, and safety standards (IEC, UL, ISO).
- Hands-on experience with hardware testing, lab instrumentation, and system commissioning.
- Excellent communication and cross-functional collaboration skills.

Job title:	Principal Power Electronics Engineer
Job type:	Permanent
Emp type:	Full-time
Salary type:	Annual
Salary:	GBP £75,000.00
Job published:	03-12-2025

Requirements

Master's or PhD in Electrical Engineering, Power Electronics, or related field.
10+ years of experience in power electronics design, focusing on **DC/DC, AC/DC, and DC/AC conversion**.
Extensive expertise in **SiC and GaN-based power electronics** for high-efficiency designs.
Strong proficiency in **LTSpice, PLECS, MATLAB/Simulink, Altium, or similar tools**.
Experience with **high-frequency switching, EMI/EMC compliance, and thermal management**.
Hands-on experience with **PCB layout design for high-power circuits**.
Deep understanding of **control algorithms for power converters** (digital and analog).
Familiarity with **power magnetics, gate drivers, and high-voltage isolation techniques**.
Proven track record of **leading projects from concept to production**.

Why Power Electronics?

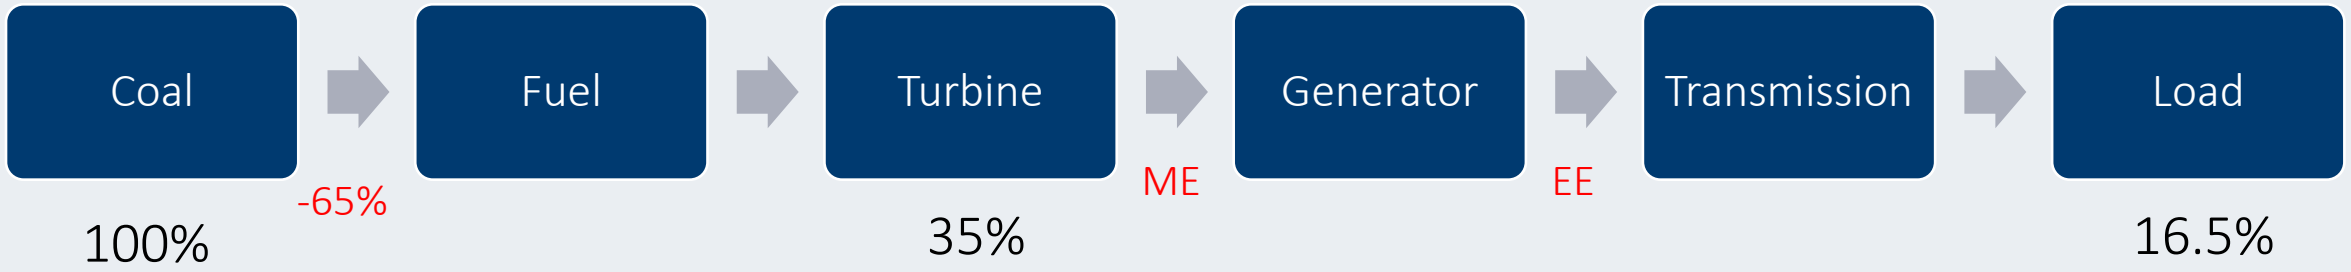


- Fossil fuel (Oil, natural gas and coal) still the most used energy source, >85%.
- In best scenarios, the fossil fuel energy sources will last for +150 years
- What will happen after 150 years ? We don't know ……

But we can extend this period or even replace the traditional resources by:

1. Using it efficiently → Global warning still a problem
2. Improve the energy conversion efficiency
3. Promote more integrated renewable energy sources

} Role of Power Electronic circuits


Why Power Electronics?

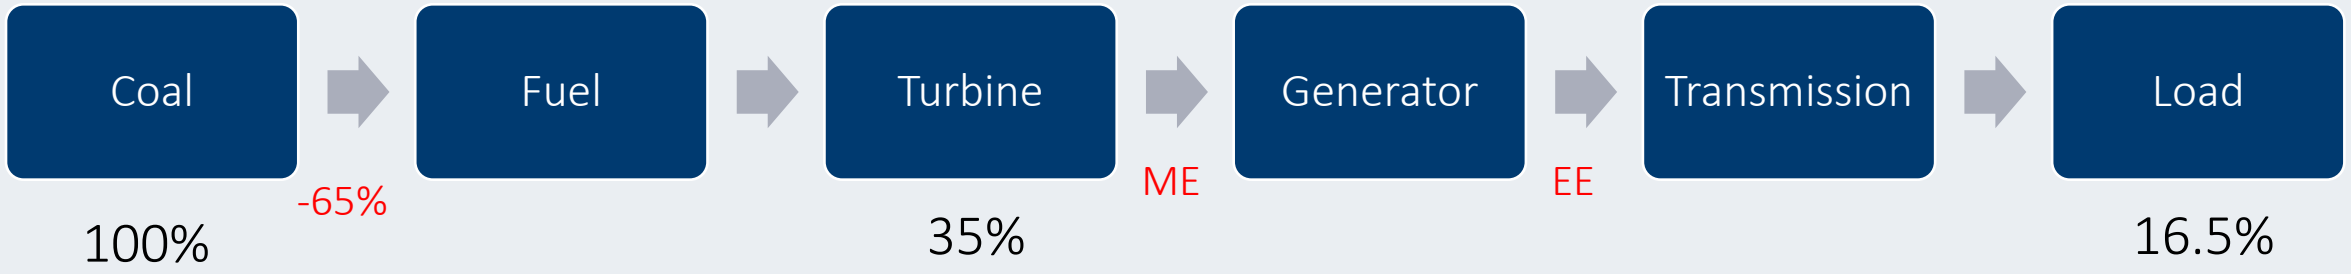



So it is necessary to have higher efficiency drives, chargers and circuits for the loads …. Done by PE.

Why do we spend effort on the load side (i.e. Motor efficiency) when most of losses are at front end ?

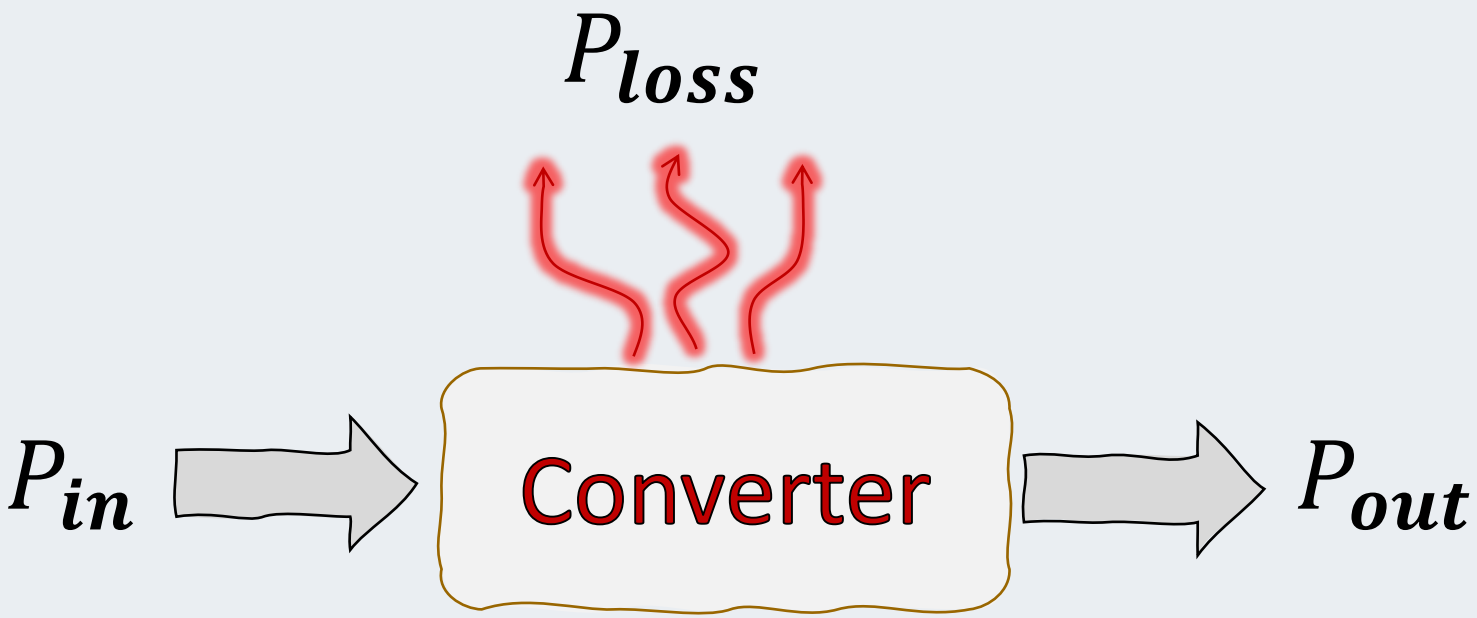

$$\eta = \frac{P_{out}}{P_{in}}$$

$$P_{in} = P_{out} + P_{loss}$$


$$\eta = \frac{P_{out}}{P_{out} + P_{loss}}$$

$$\eta(P_{out} + P_{loss}) = P_{out}$$

$$P_{out} = \frac{\eta}{1 - \eta} P_{loss}$$

$$P_{out} = \frac{\eta}{1-\eta} P_{loss}$$


$P_{loss} = 1\ kW$

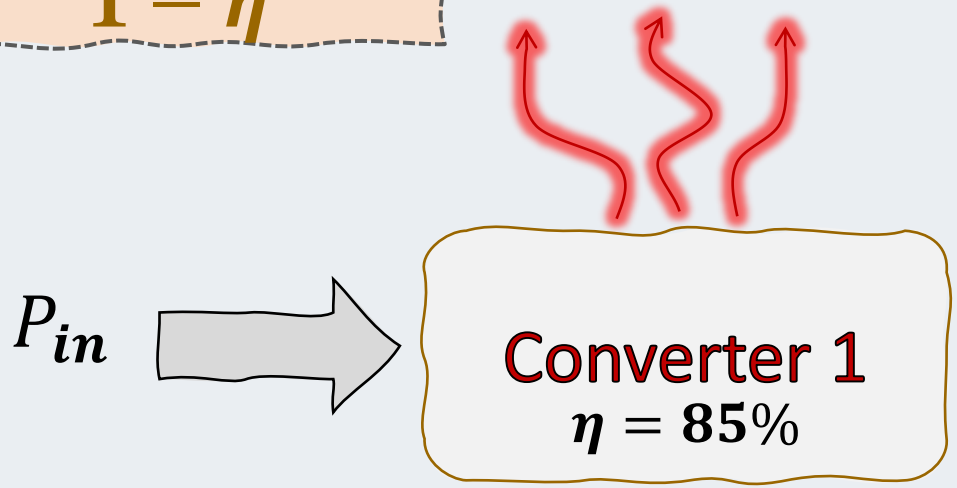

$$P_{out1} = \frac{0.85}{1-0.85} \times 1k = 5.7kW$$

$P_{loss} = 1\ kW$

Same size

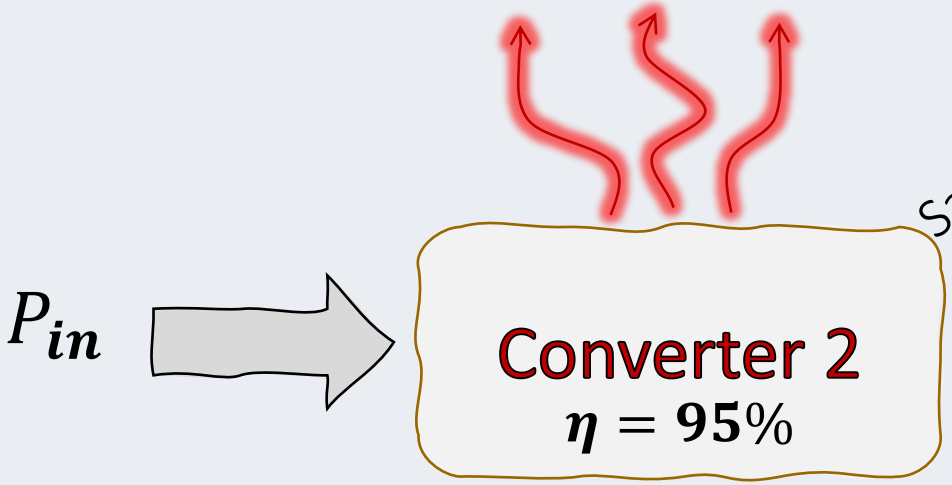

$\times 3$

$$P_{out2} = \frac{0.95}{1-0.95} \times 1k = 19\ kW$$

Higher Efficiency

Switches

Diodes, transistors, thyristors

Silicon, Silicon Carbide, GaN


Topologies

Interleaving, switched capacitors, etc


Hard and soft switching


Power Semiconductor Devices


The power semiconductor devices are used as on/off switches in power control circuit. These devices are classified as follows.

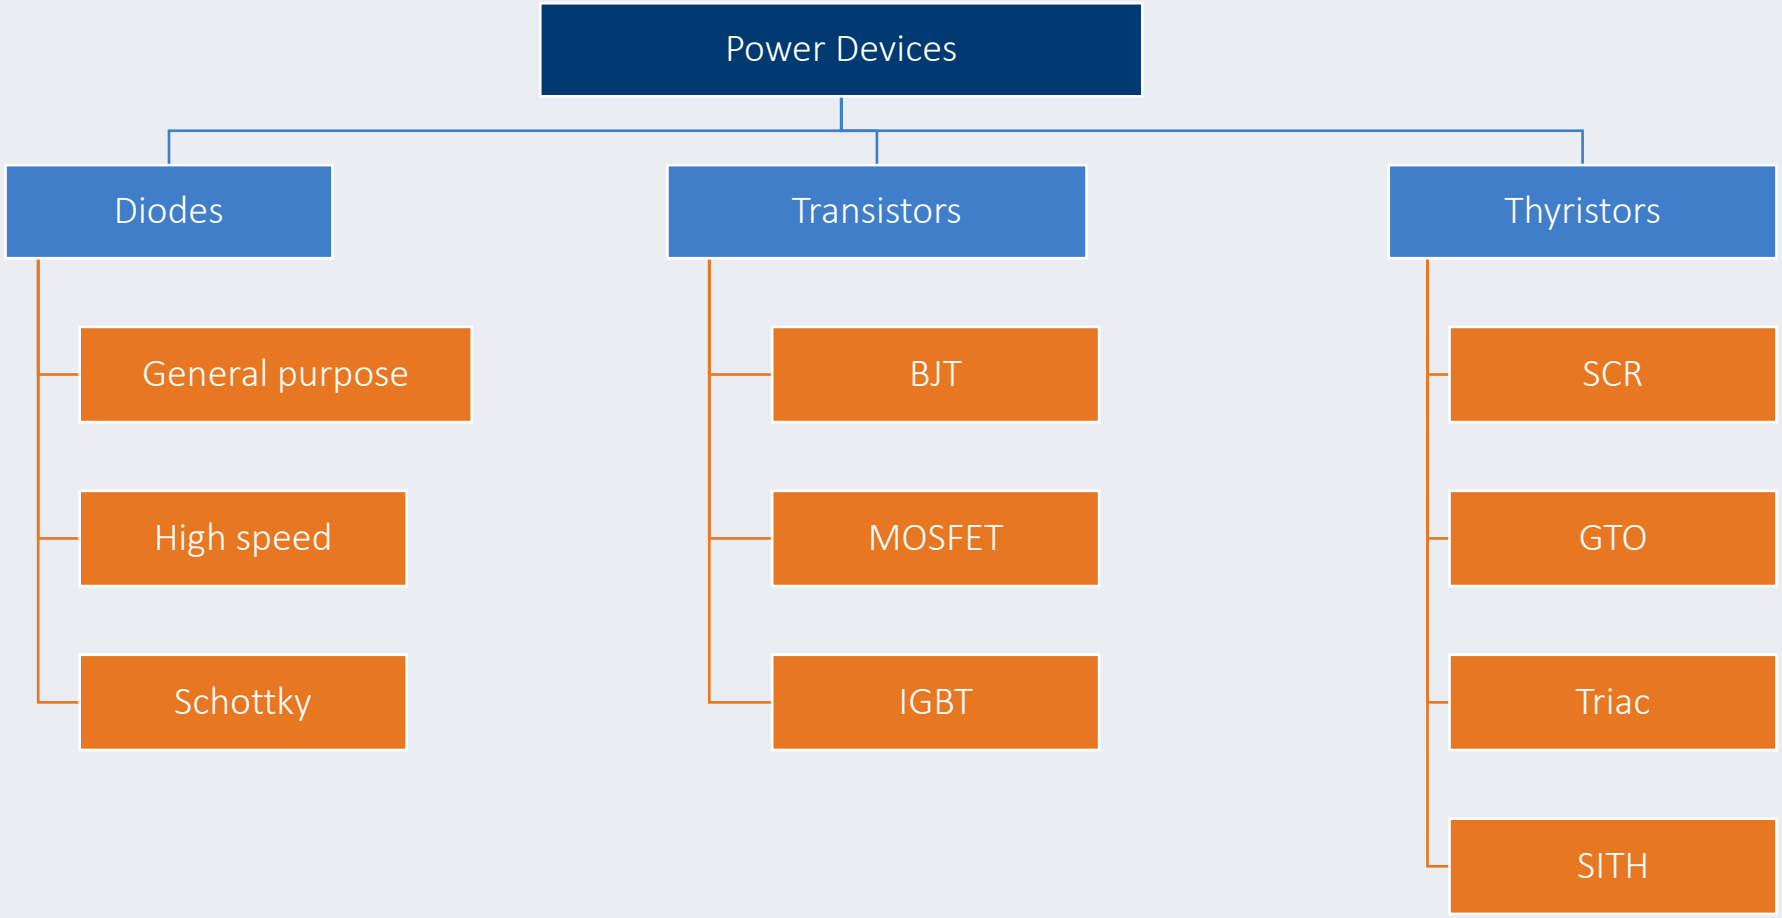


Power Semiconductor Topologies

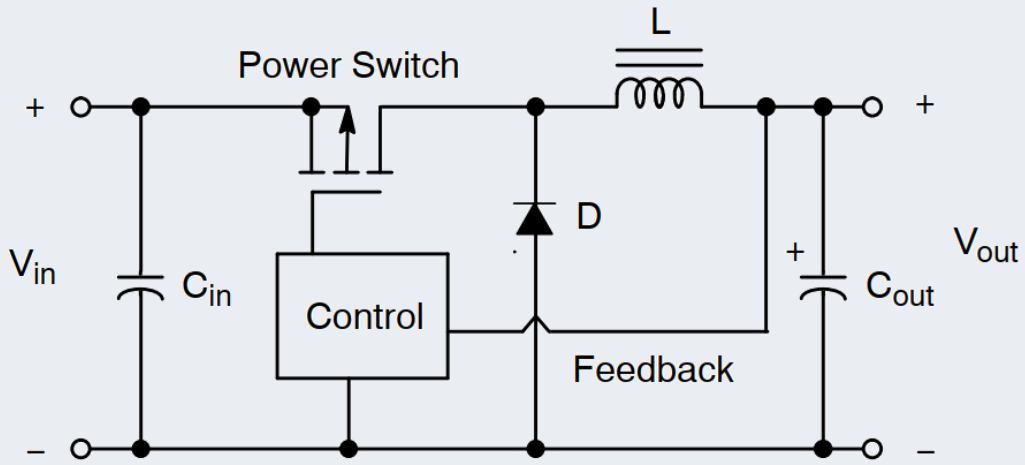


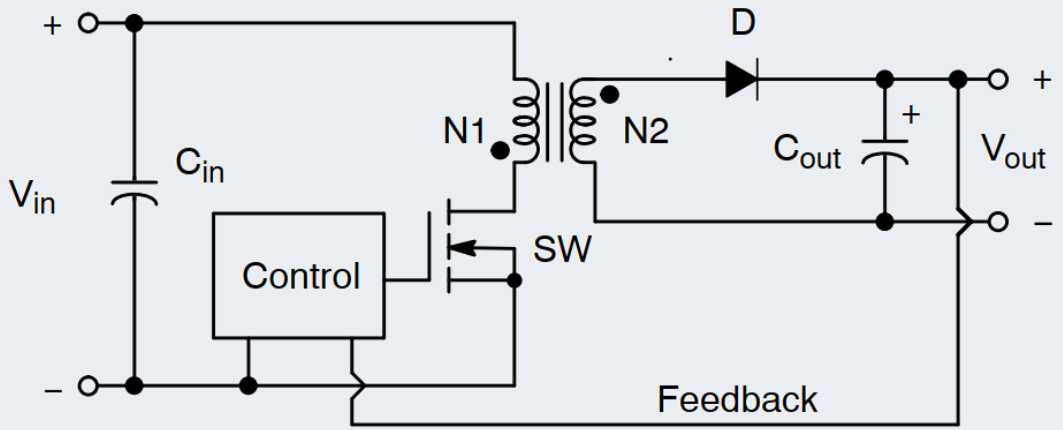


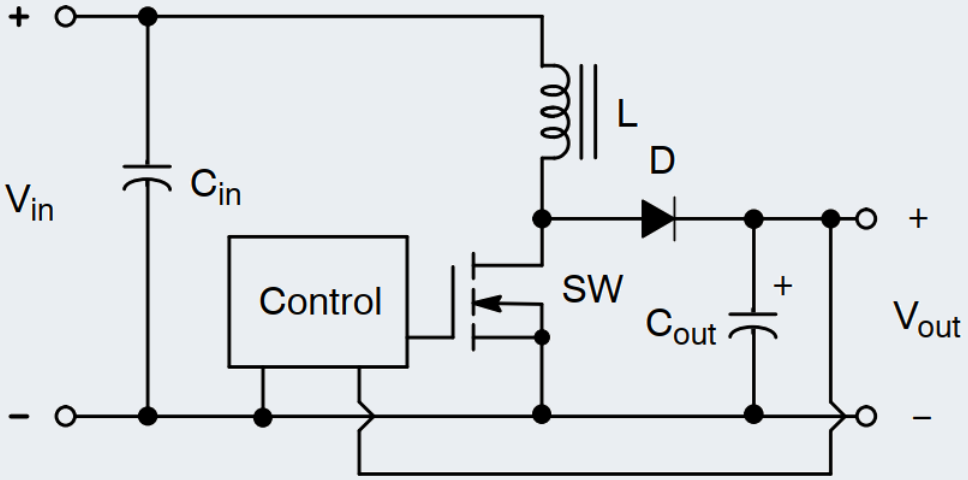

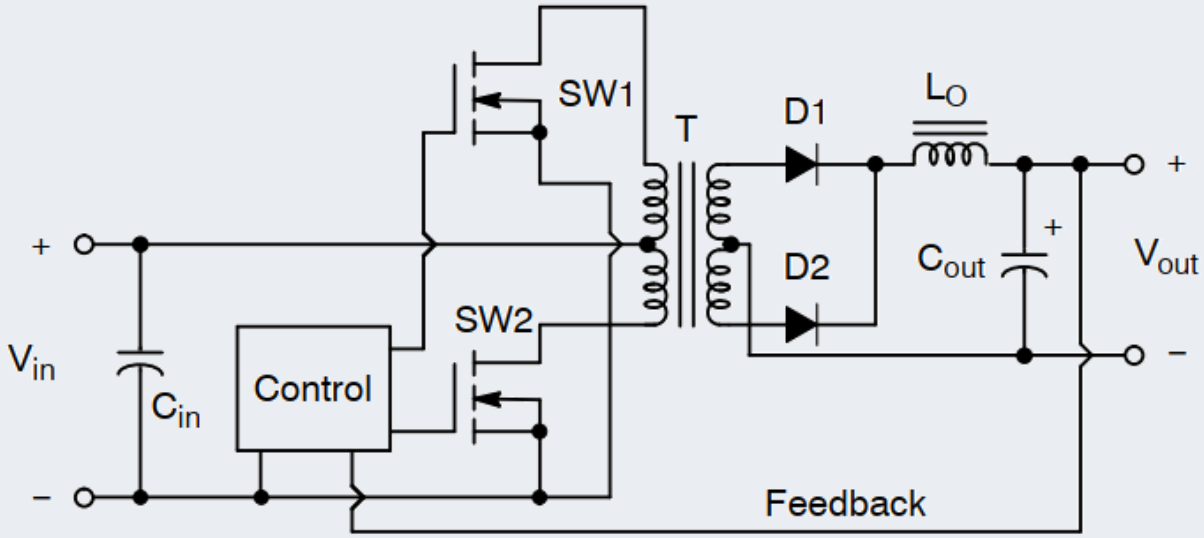



Power Semiconductor Devices

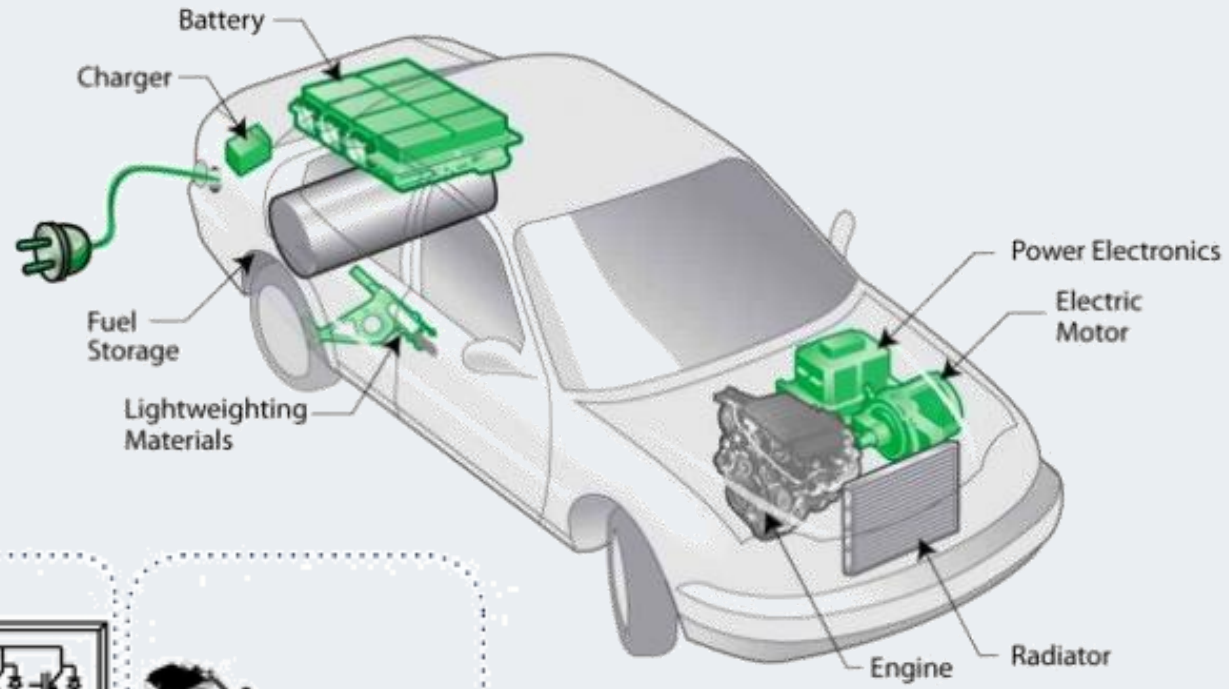


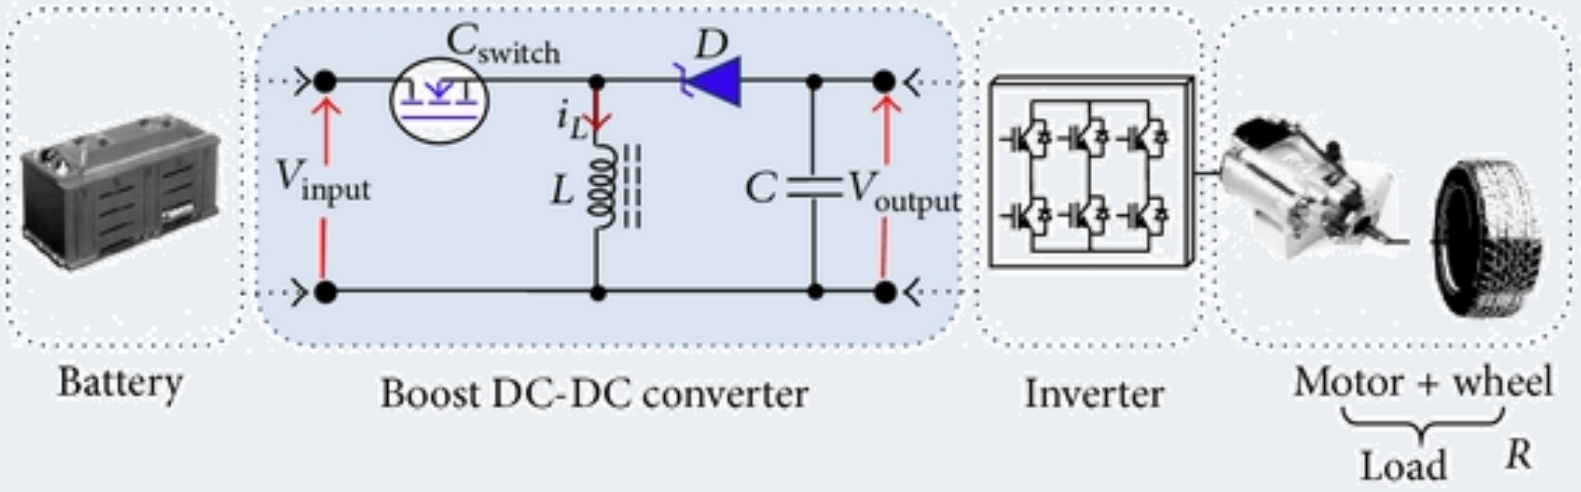


Why Pulse Width Modulation (PWM)

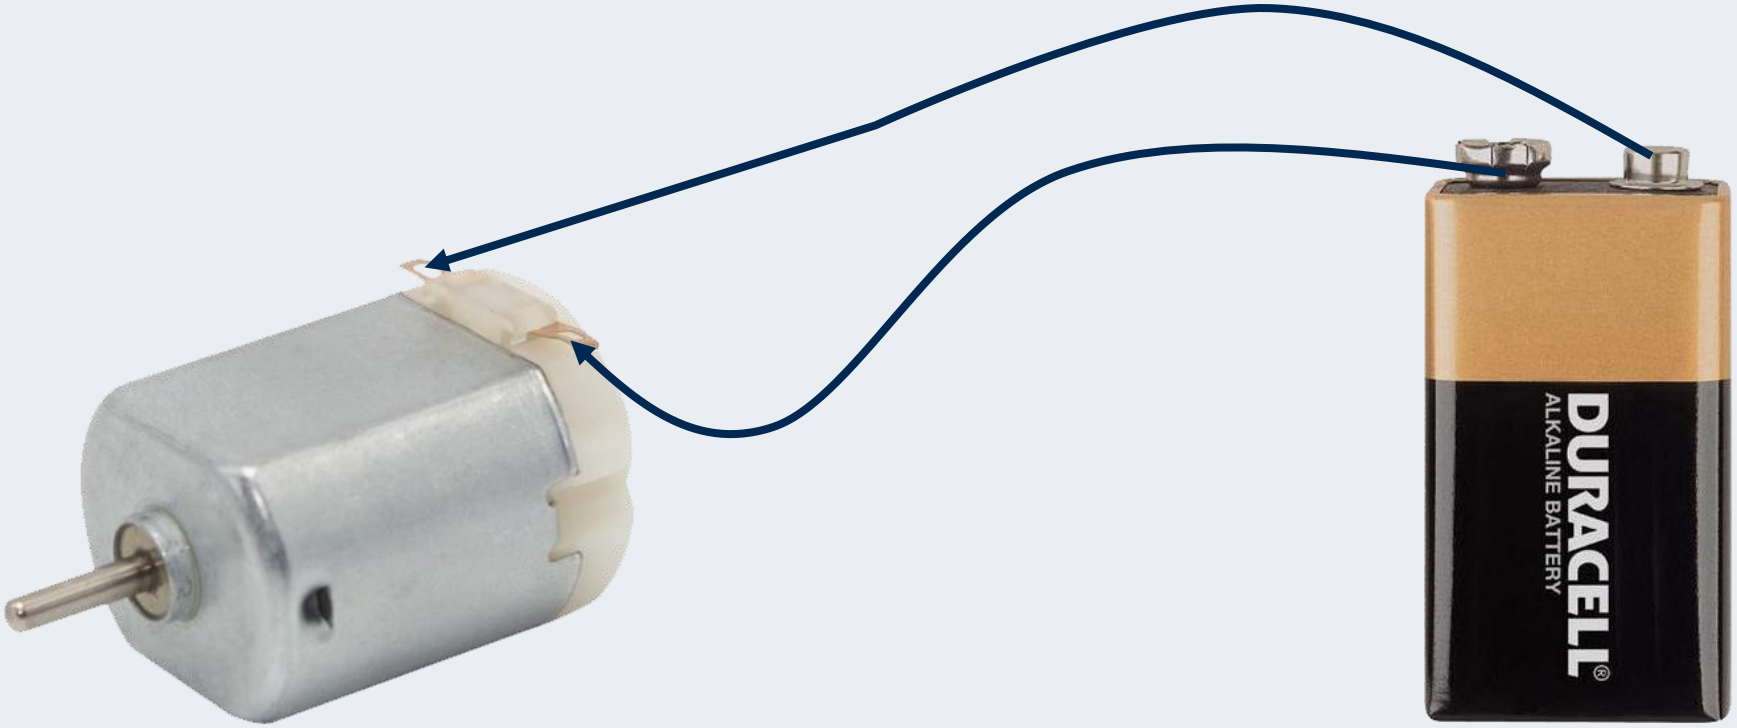

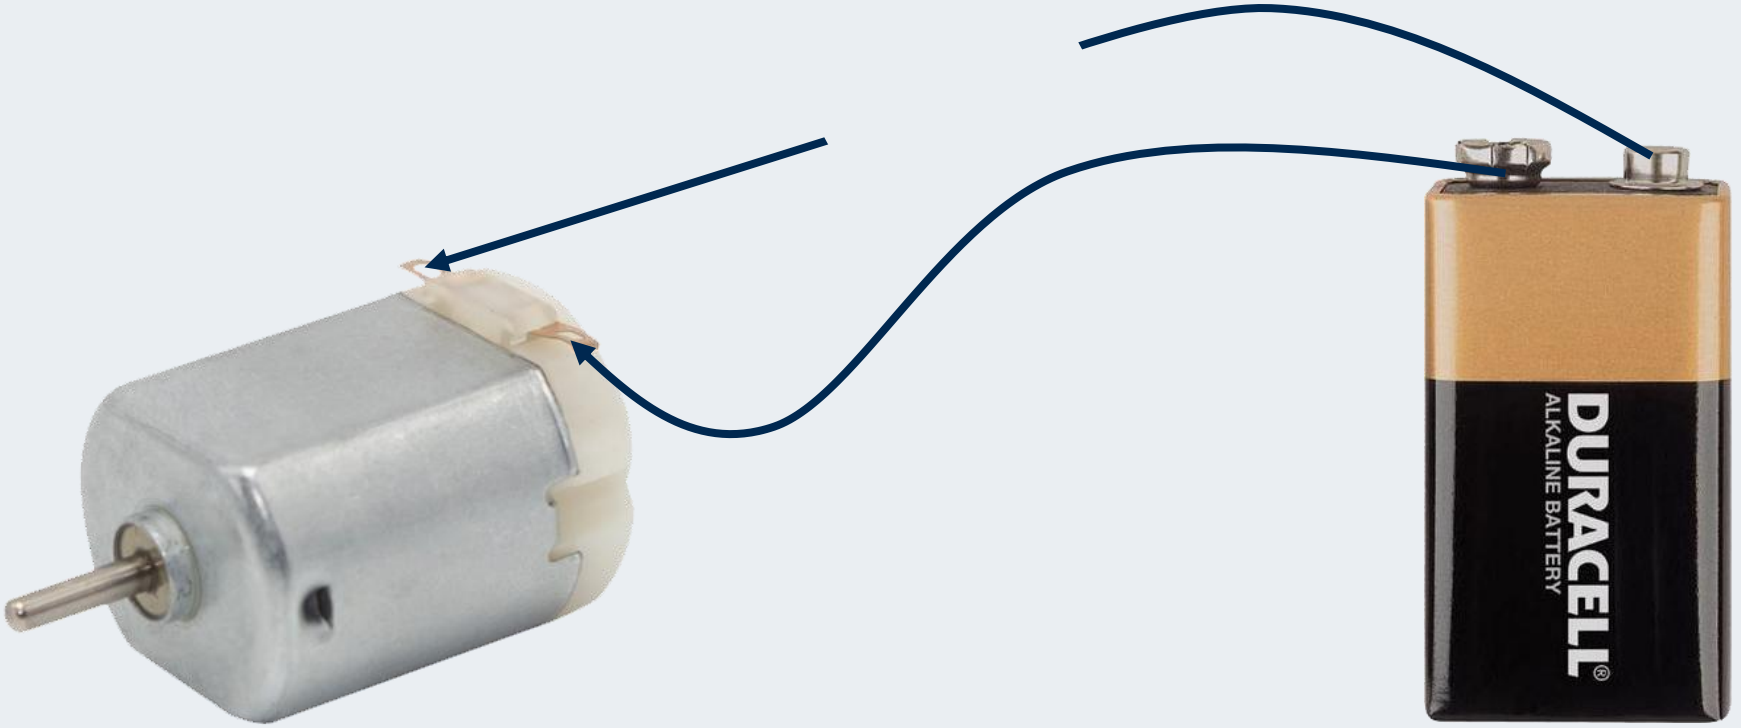
DURACELL
ALKALINE BATTERY

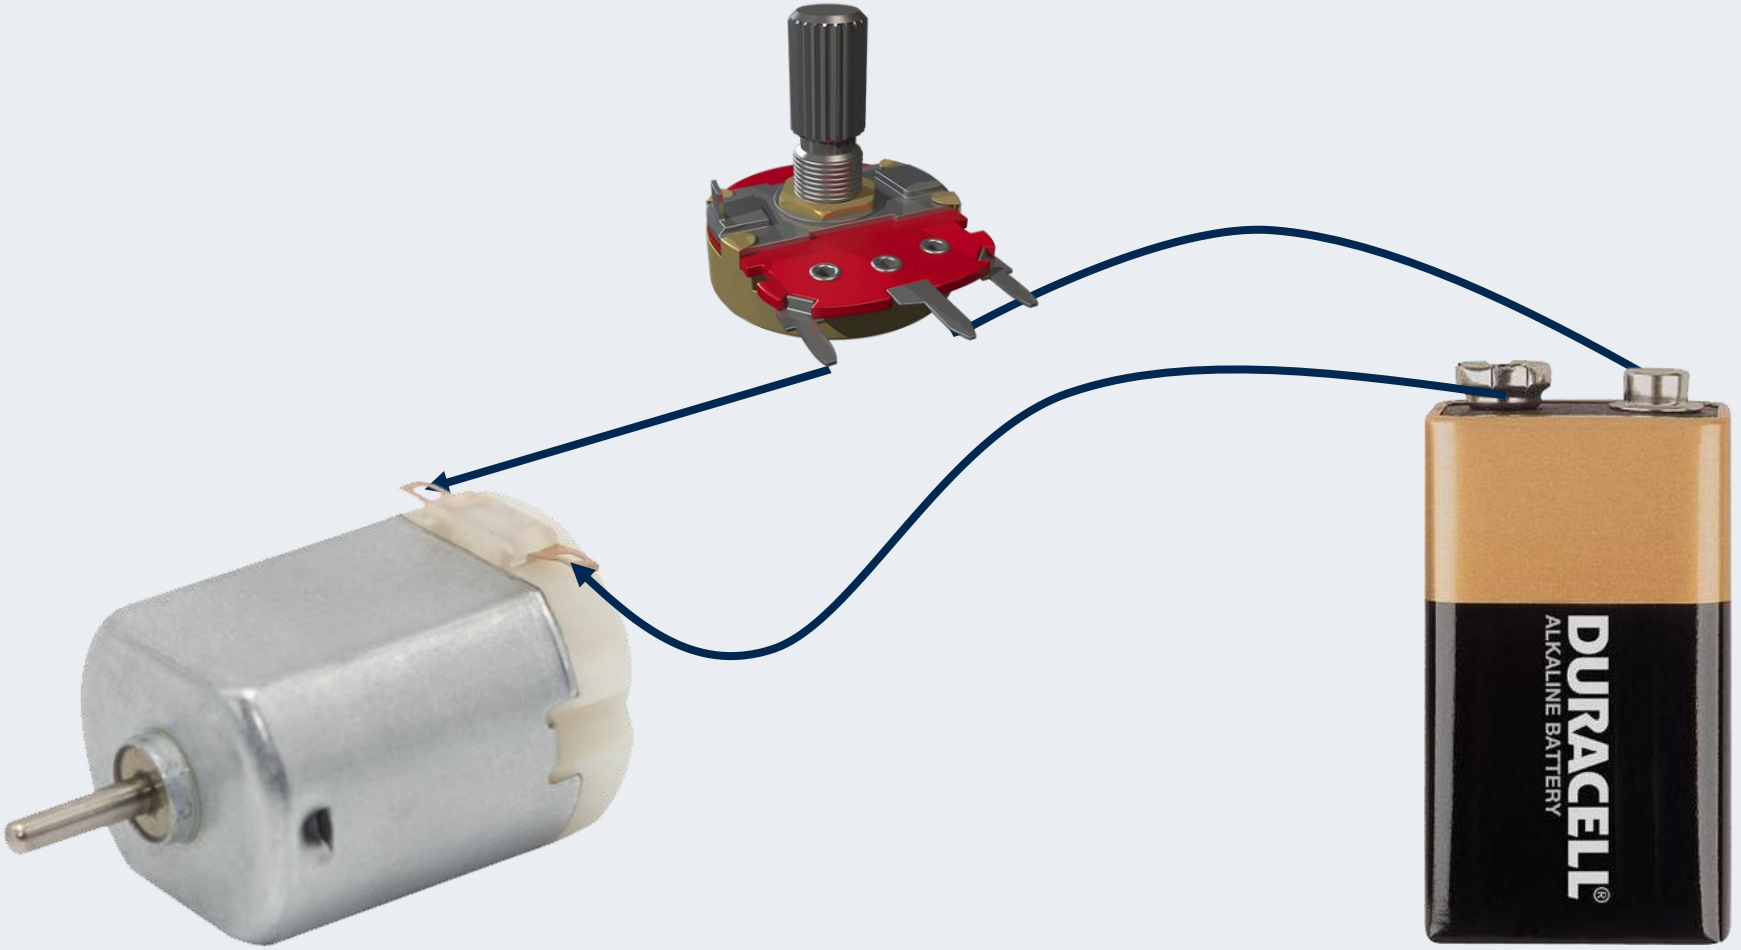

DURACELL
ALKALINE BATTERY

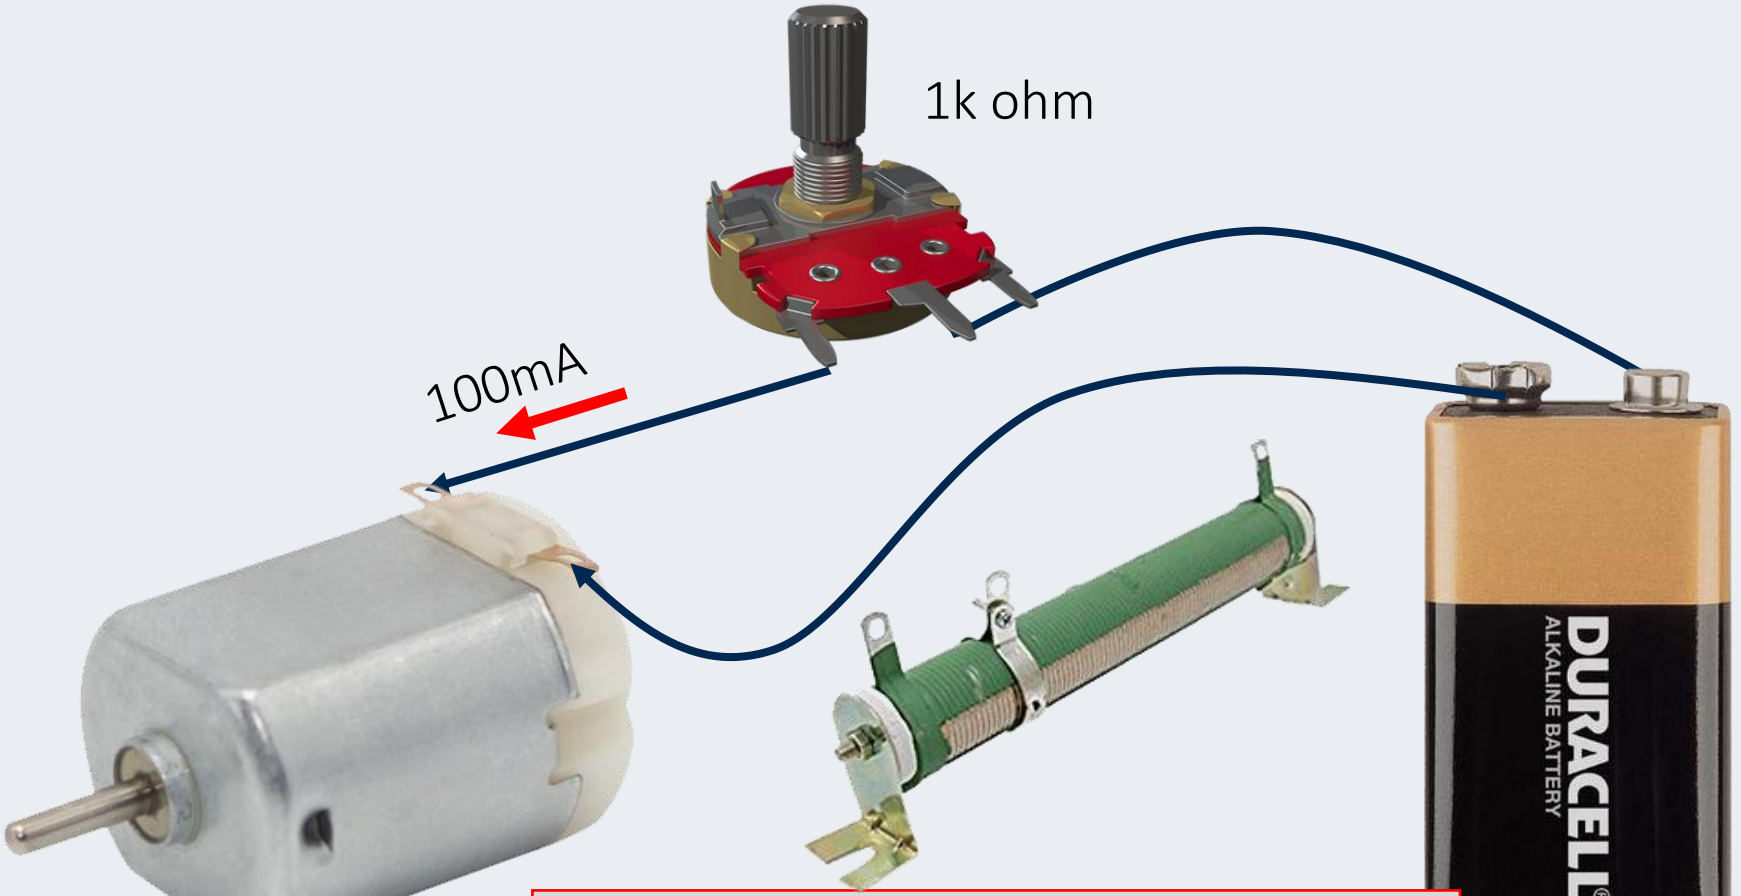


$P = (100m)^2 * 1k = 10\ W$


$P = (1)^2 * 100 = 100\ W$

Linear operation

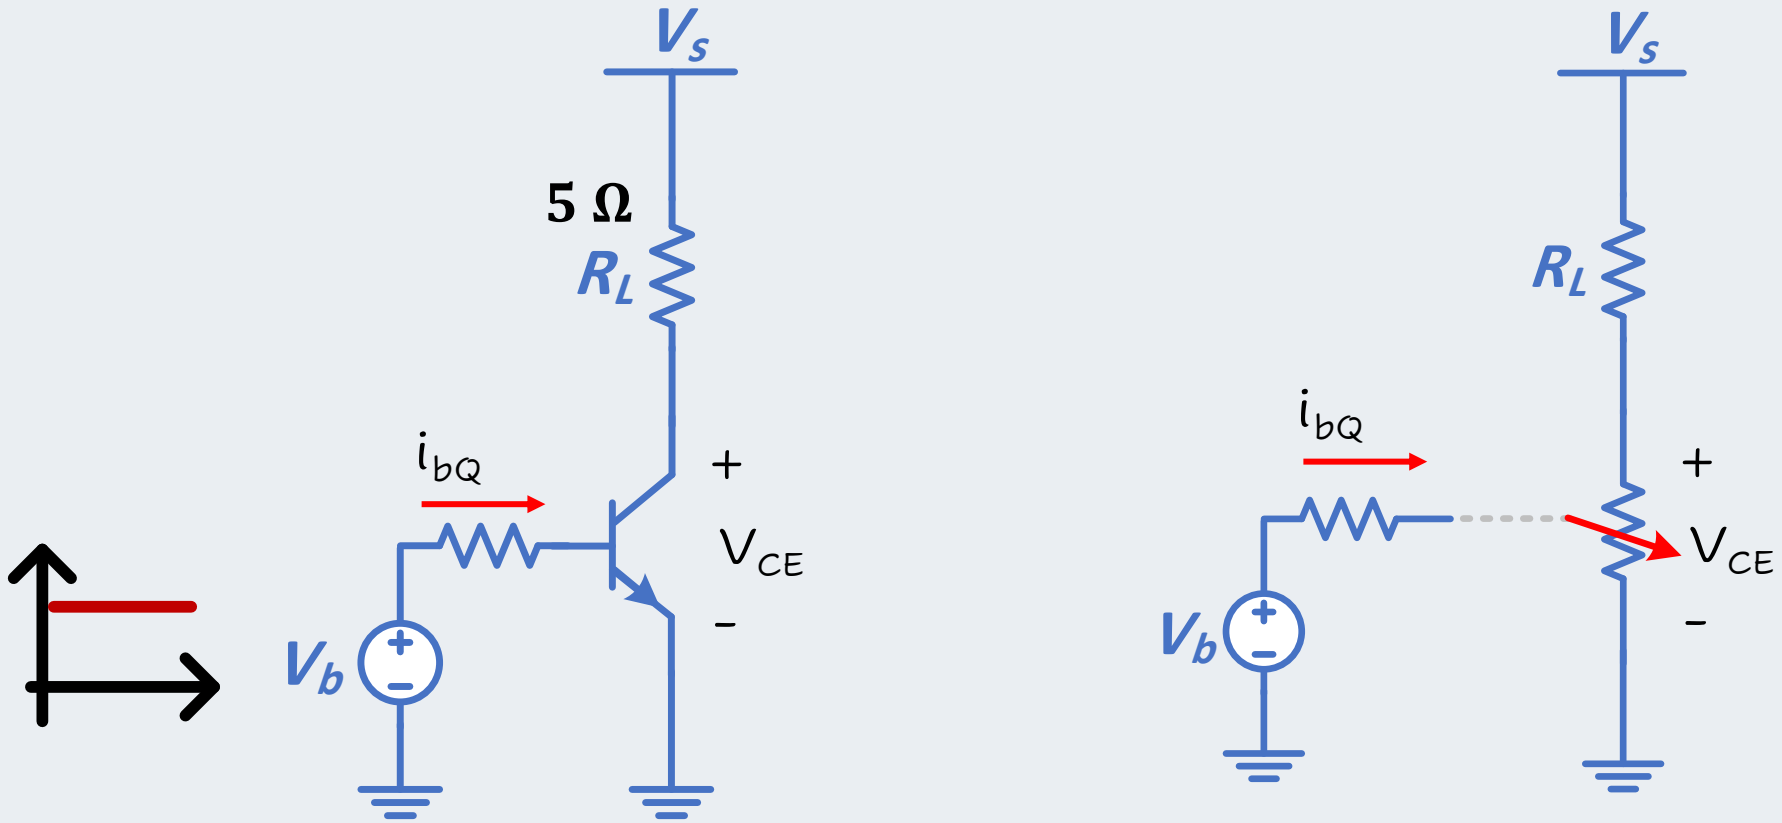



Linear operation

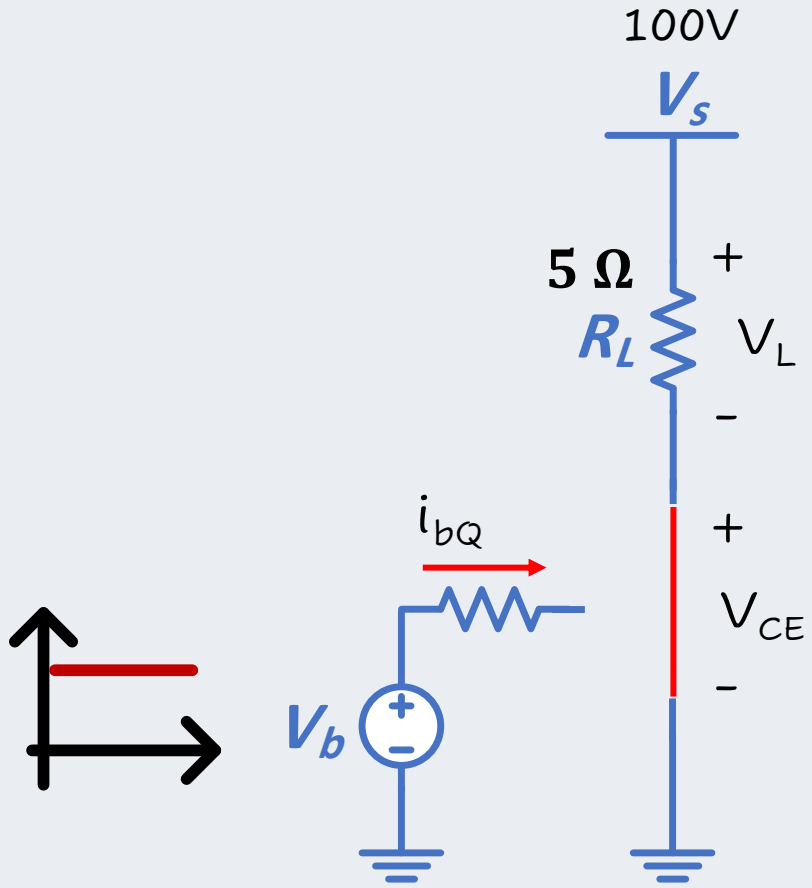

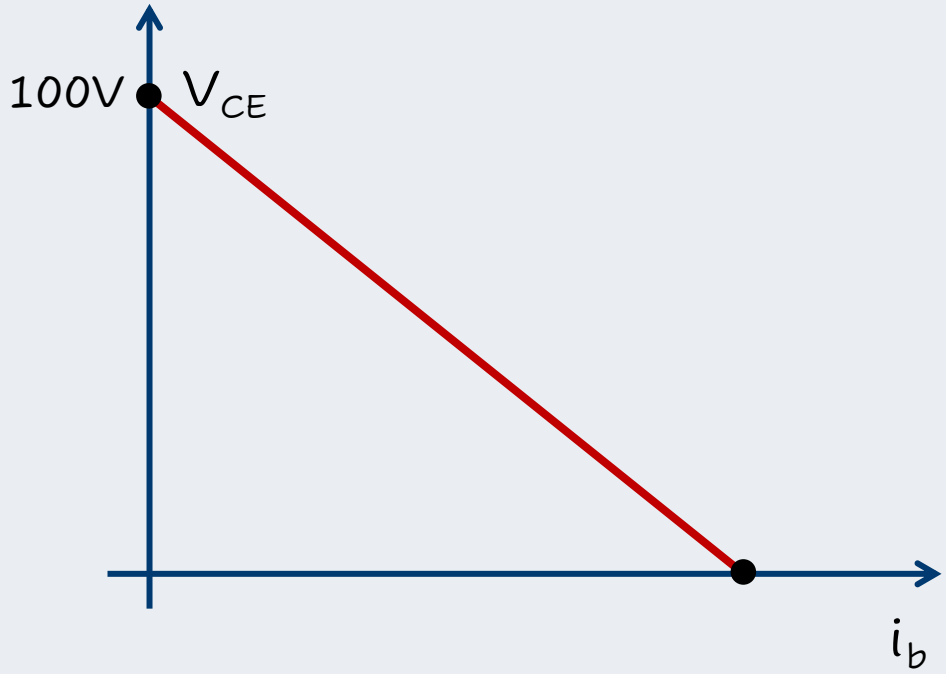

Linear operation

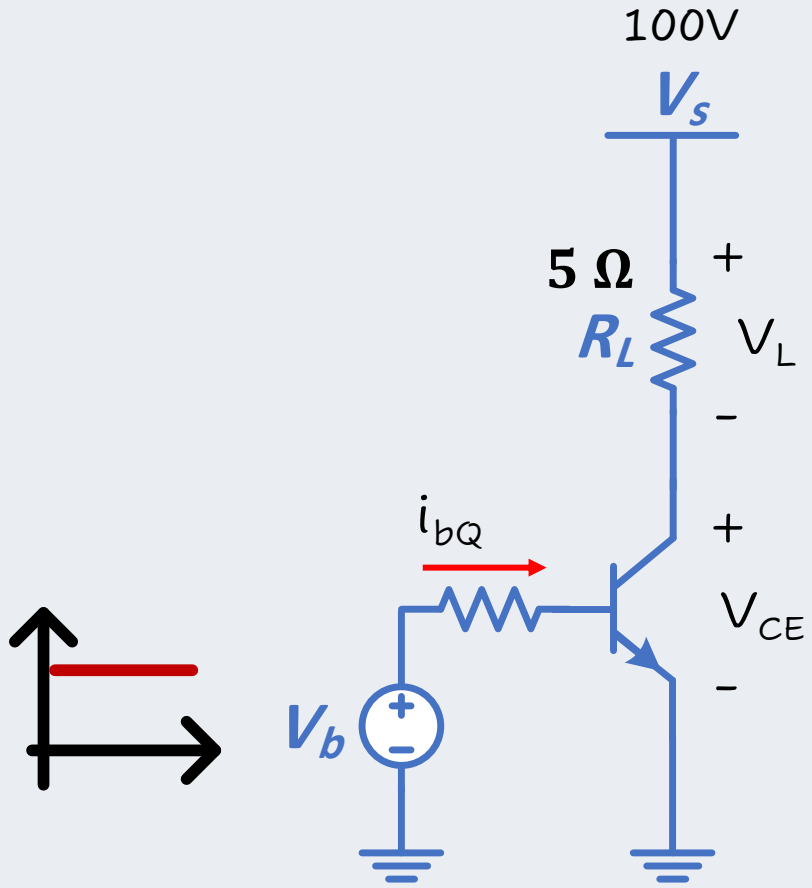


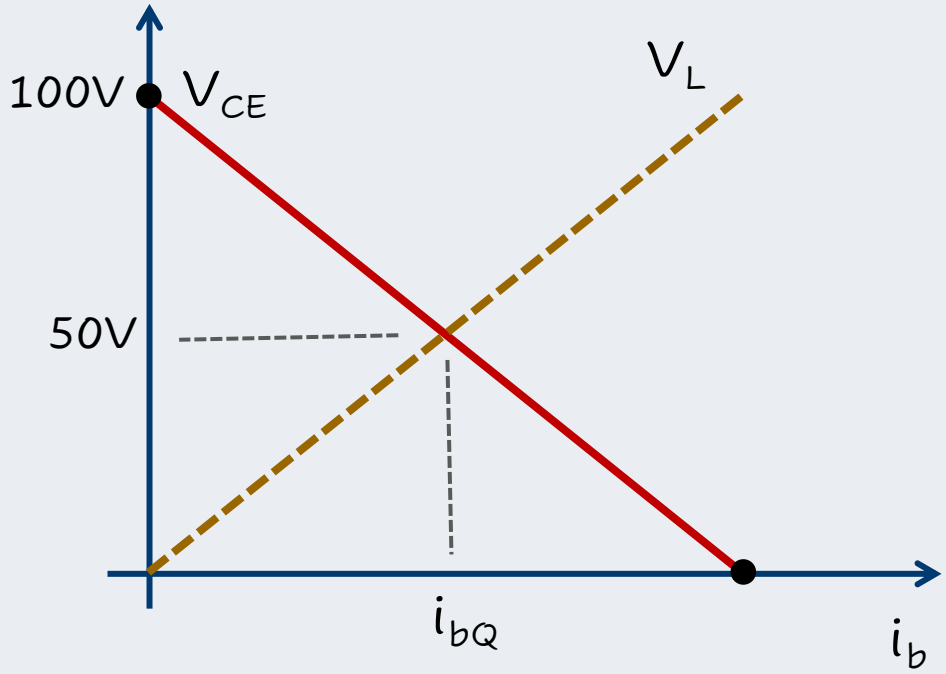


$$I_C = \frac{50}{5} = 10A$$

$$P_t = V_{CE} \times I_C$$

$$P_t = 50 \times 10 = 500W$$

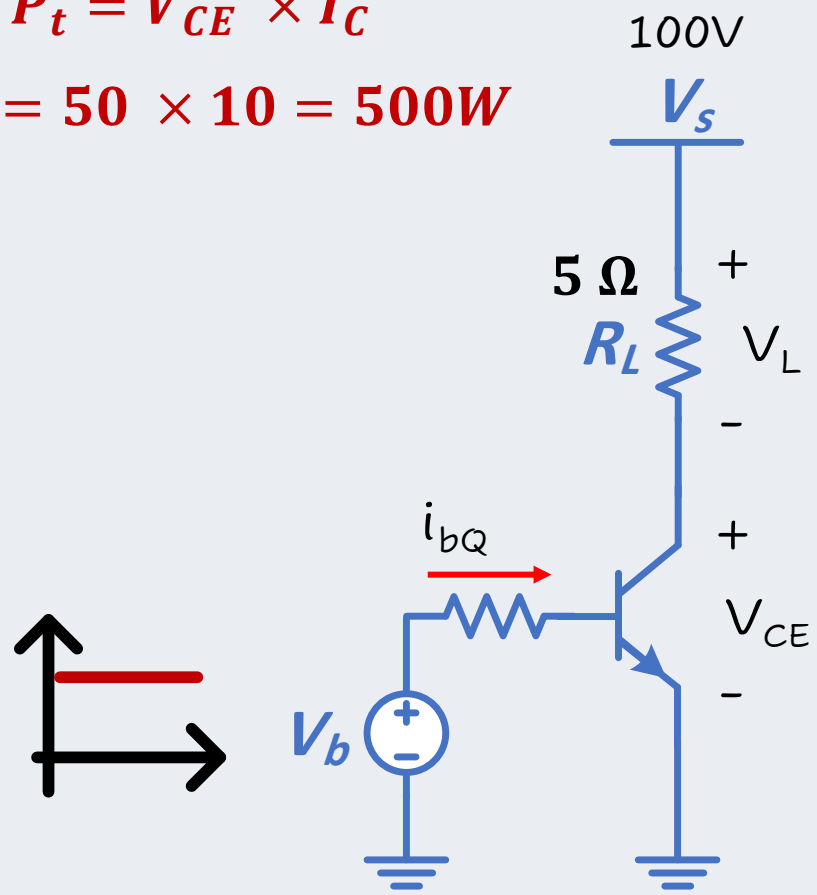


Linear operation

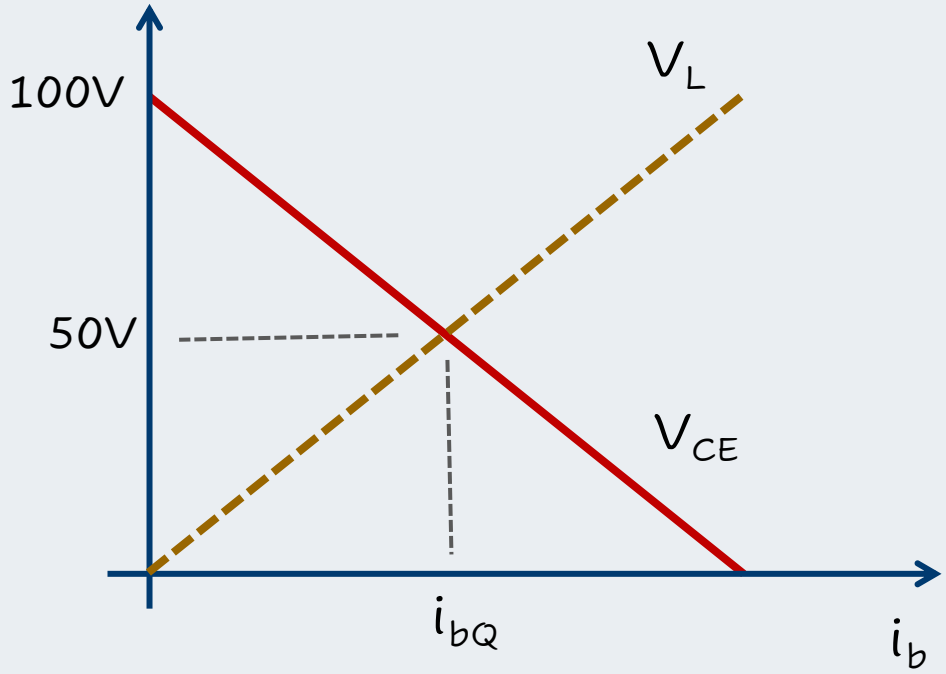


What is the PWM ?



Voltage

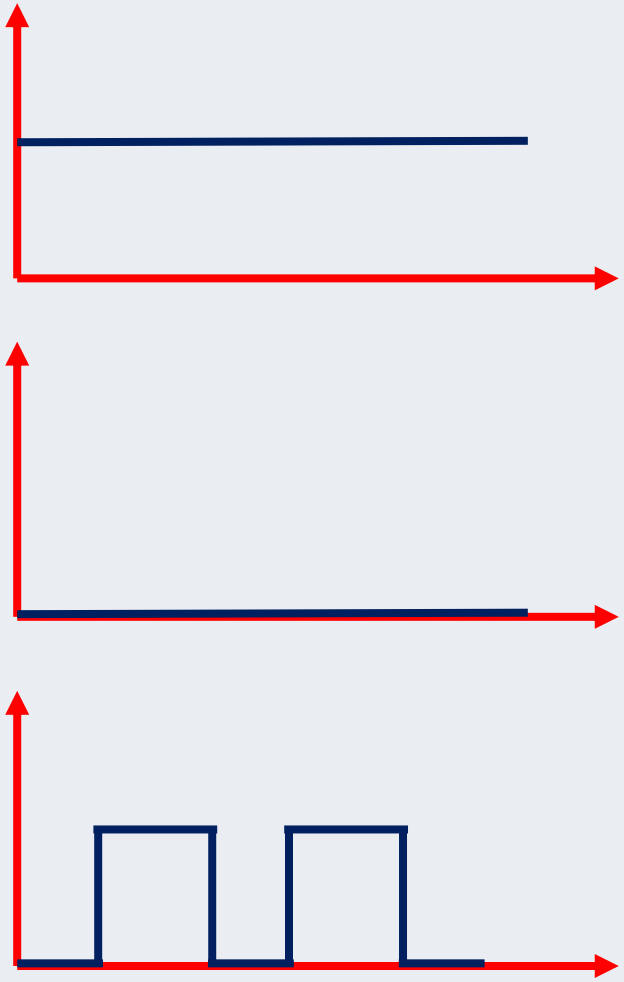


Pulse Width Modulation ?

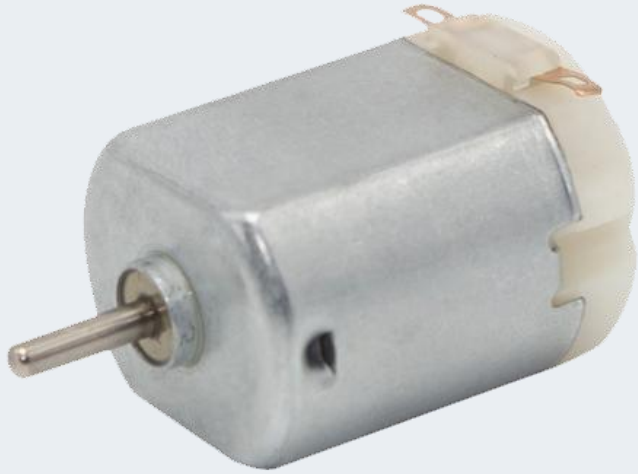

Average (mean) value

What is the PWM ?



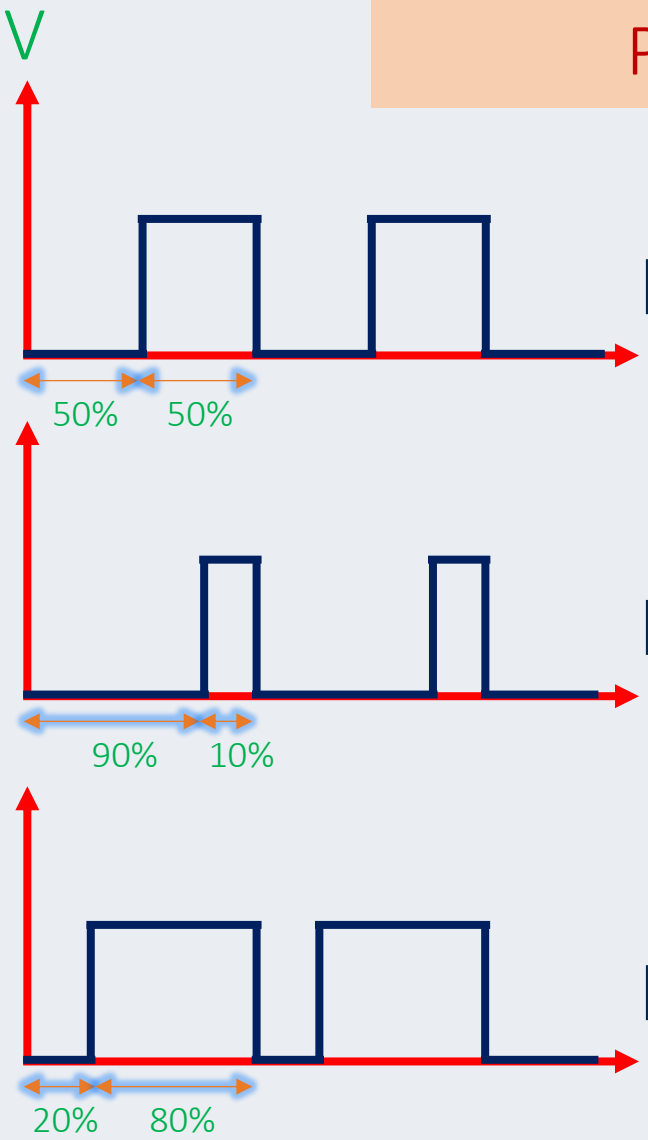


Pulse Width Modulation

Average (mean) value


50%


10%

80%

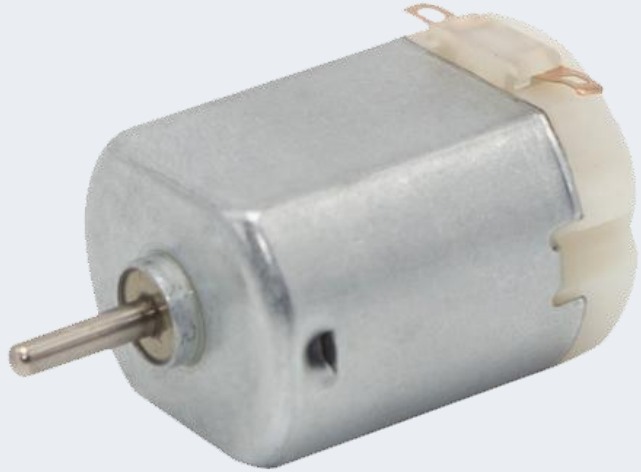

What is the PWM ?

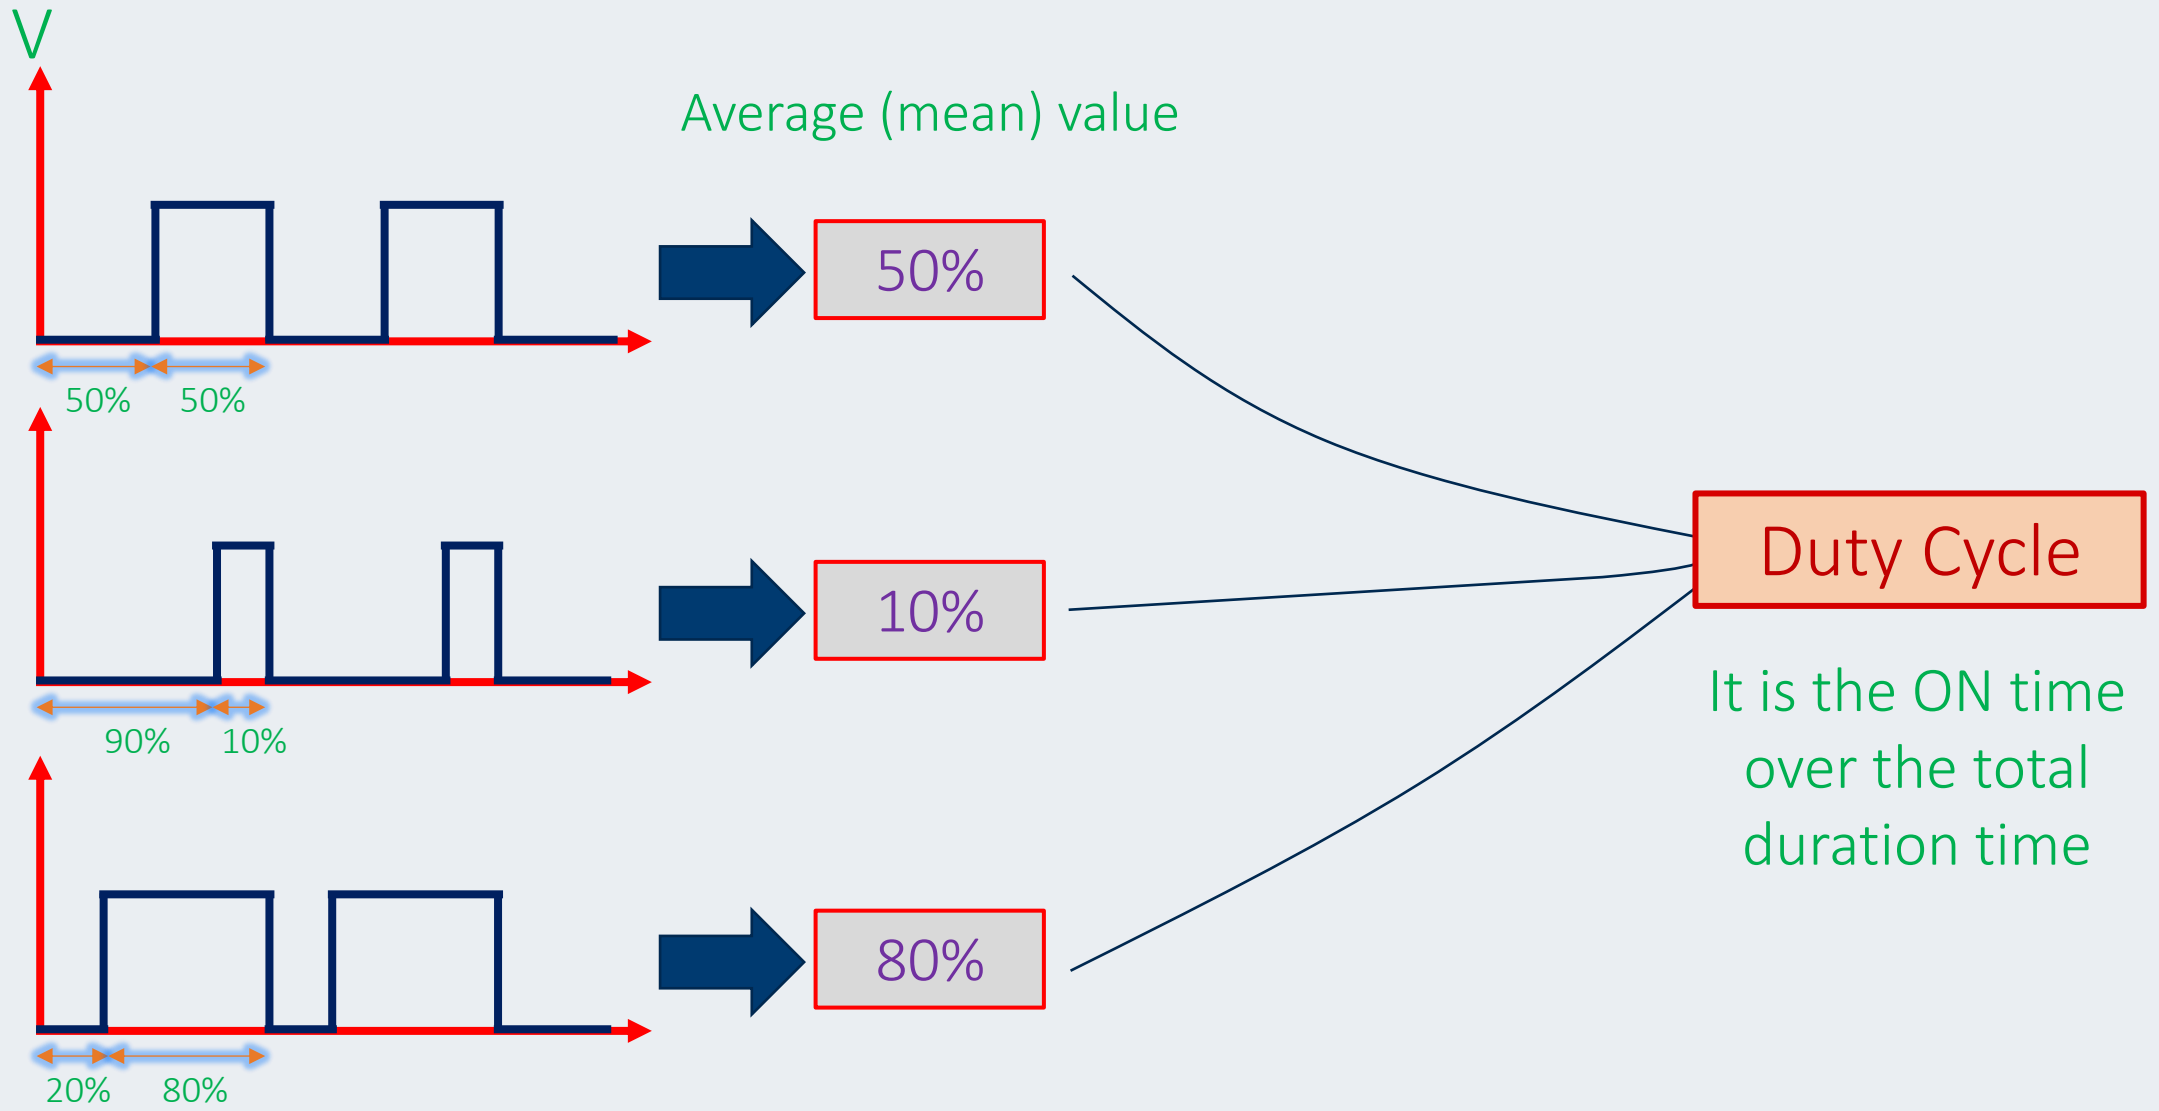


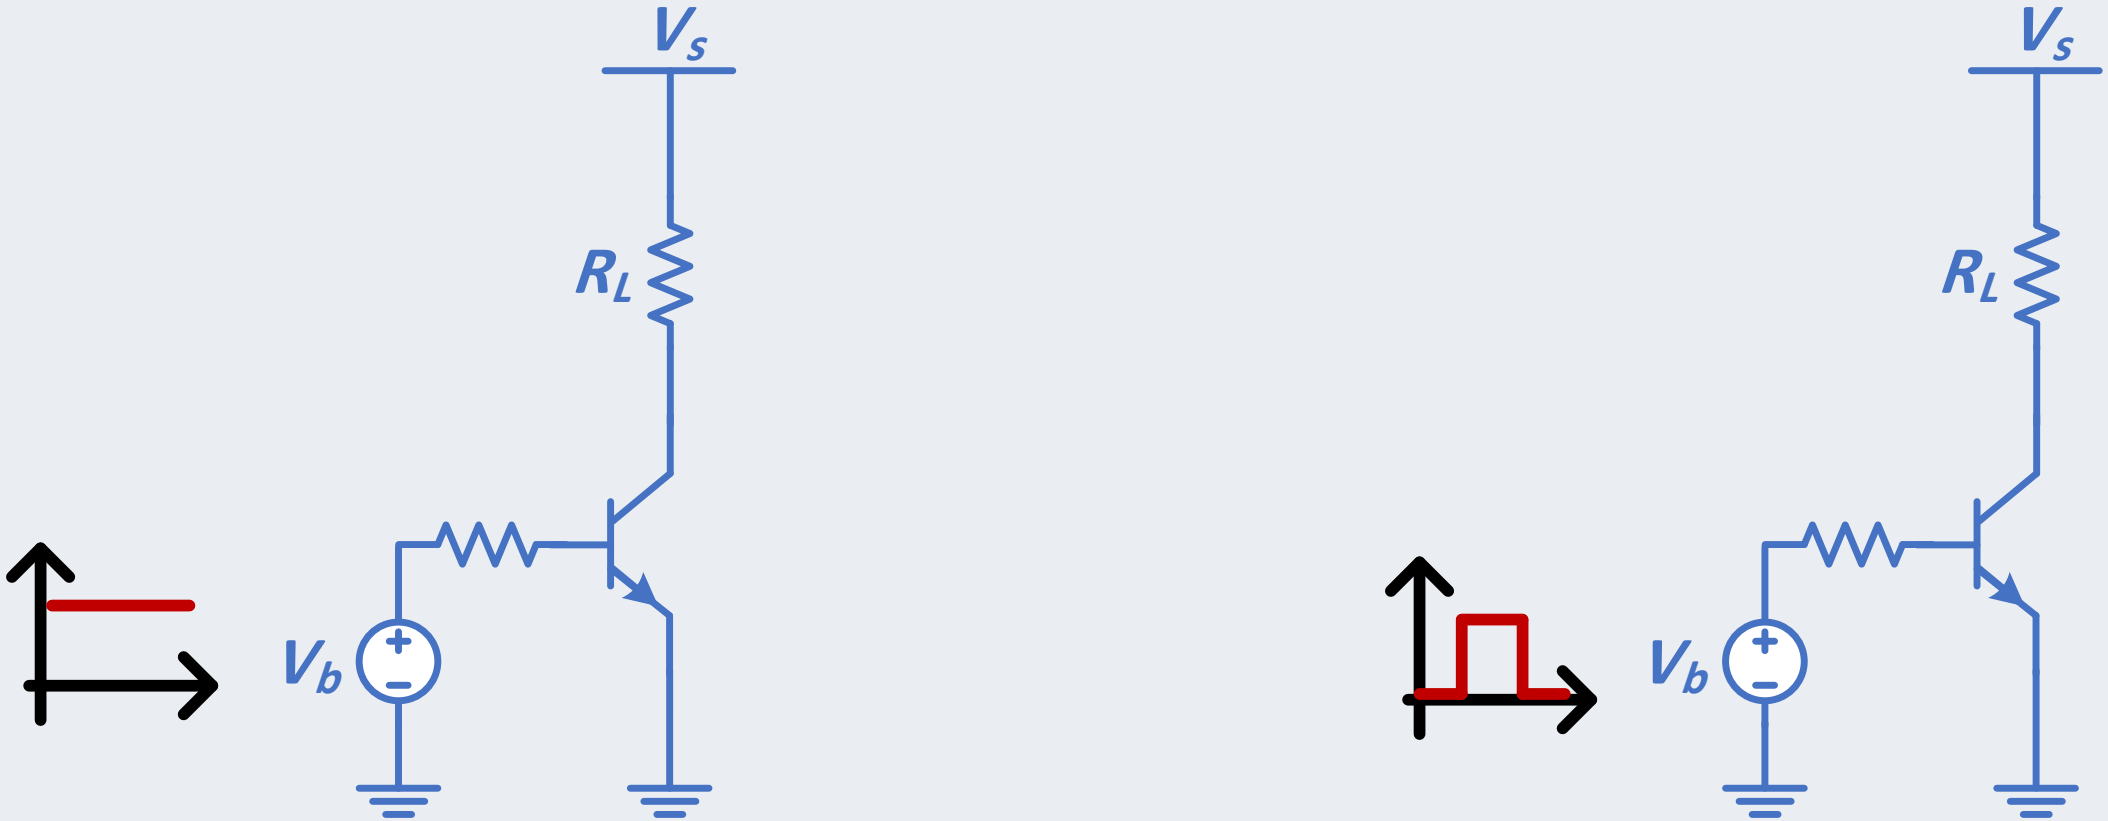
V_s
R_L
V_b
V_s
R_L
V_b


$$I_C = \frac{50}{5} = 10A$$

$$P_t = V_{CE} \times I_C$$


$$P_t = 50 \times 10 = 500W$$

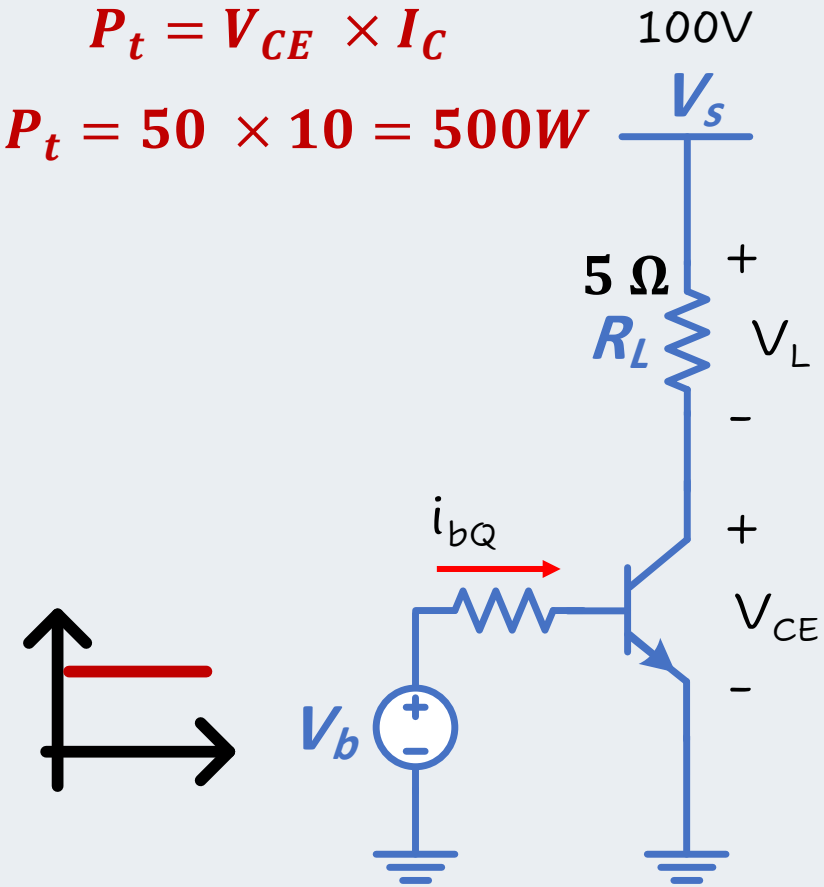


Linear operation

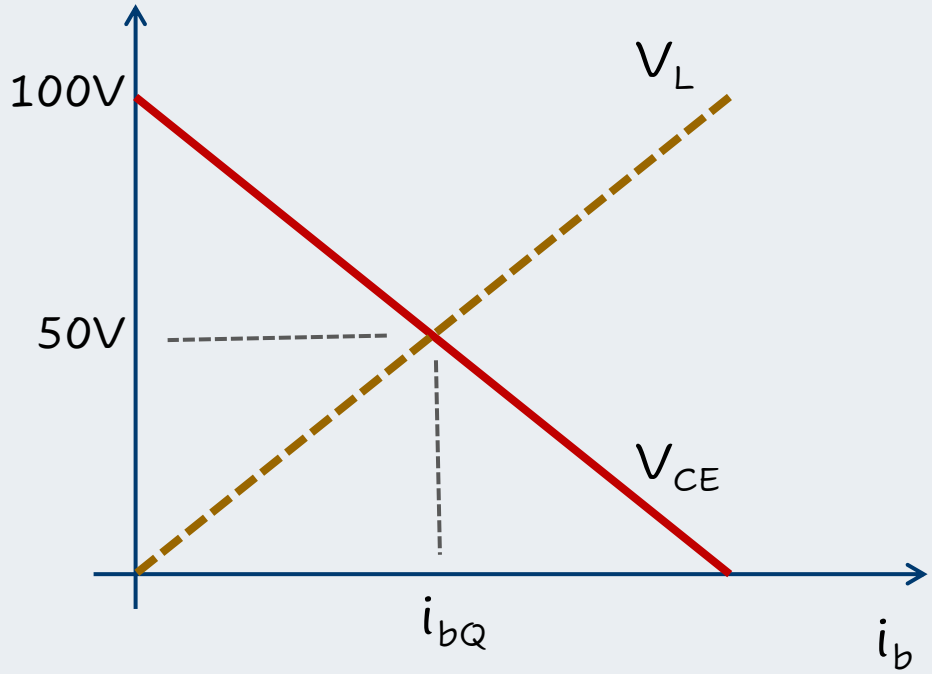

Switched operation

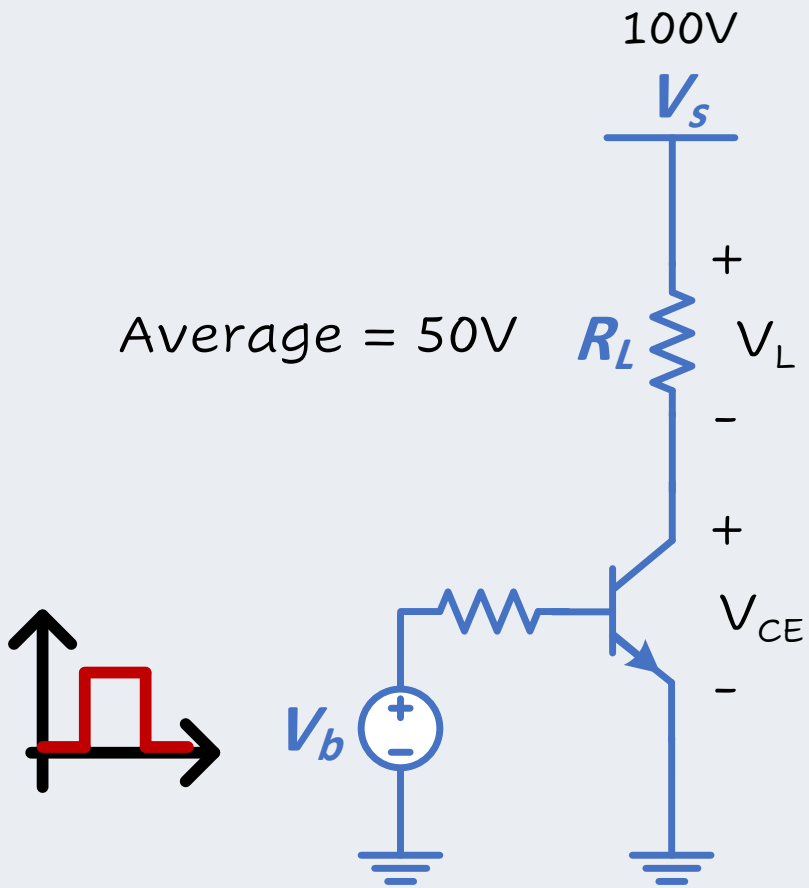

Average = 50V

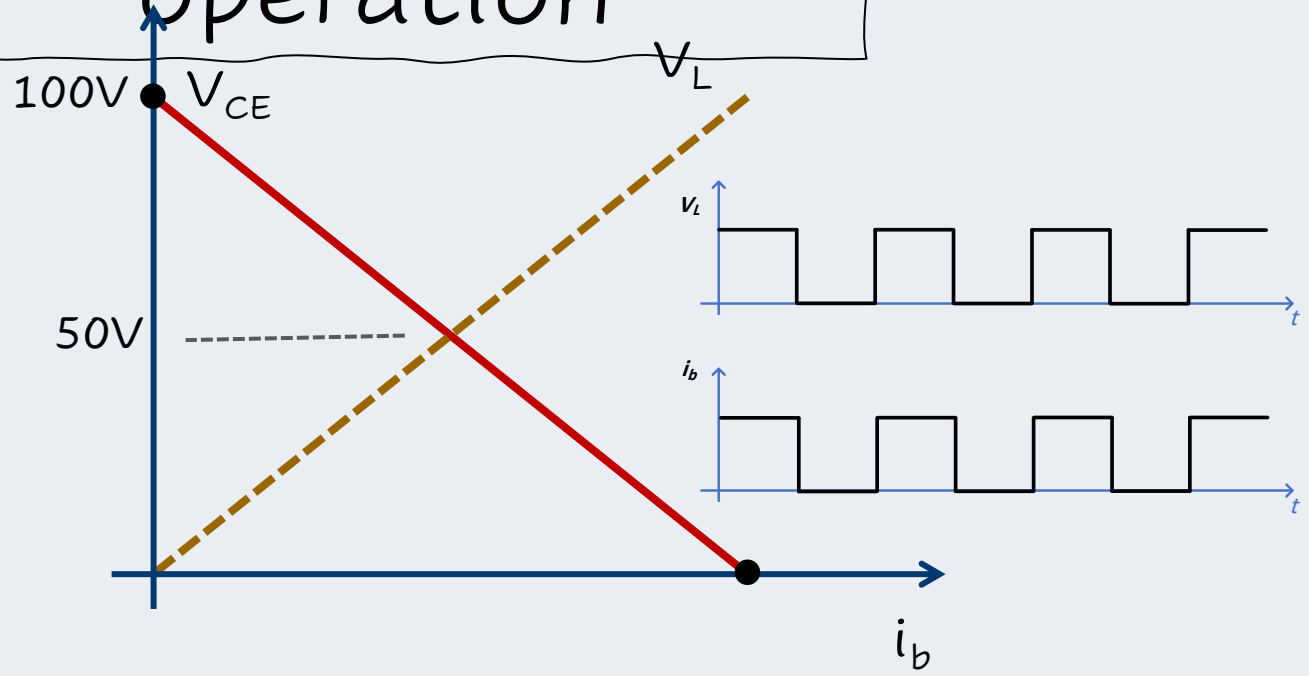


Dissipated power in transistor

Linear operation


$$I_C = \frac{50}{5} = 10A$$

$$P_t = V_{CE} \times I_C$$

$$P_t = 50 \times 10 = 500W$$

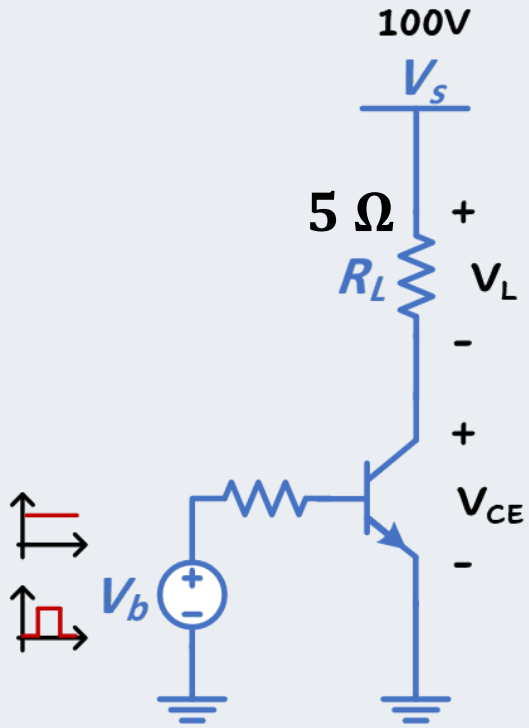

Switched operation

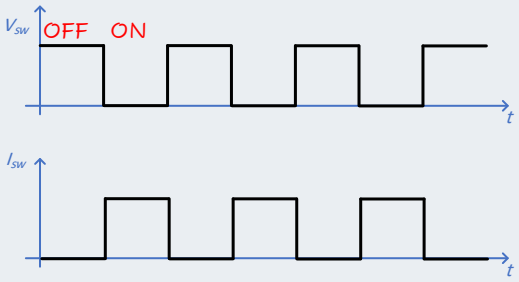

$$P_t = V_{CE} \times I_C$$

ON state $p_t = 0 \times 20 = 0W$

OFF state $p_t = 100 \times 0 = 0W$

$$Average\ P_t = 0W$$


$$P_t = \int_0^T V_{CE} \times I_C \, dt = 0W$$



Power Switches

The switches can be controlled by either

Passive The switch state depends on the polarity of the voltage across its terminals, or the current flowing thought it

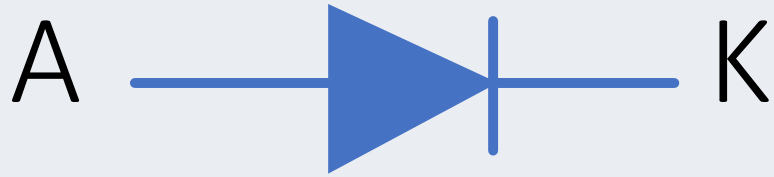

Uncontrolled


Diodes

$$V_A > V_K$$

Power Switches


The switches can be controlled by either

Active The switch state depends on some control signal applied on its terminal to control the conduction through it.

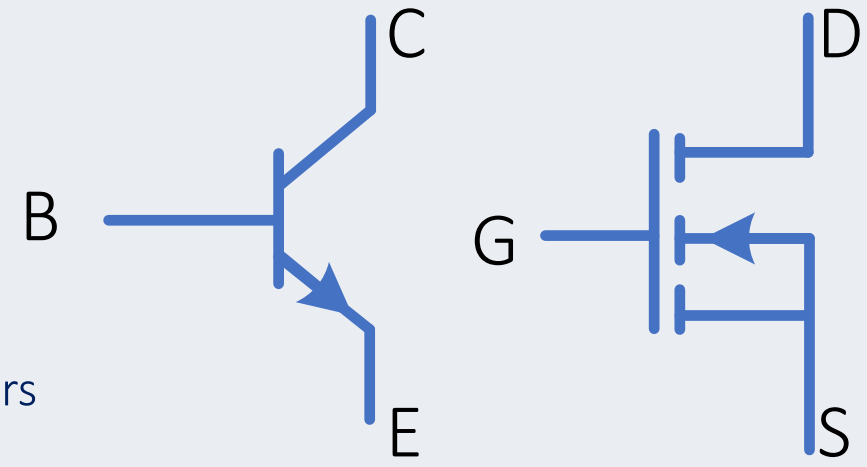

Transistors


Fully-Controlled

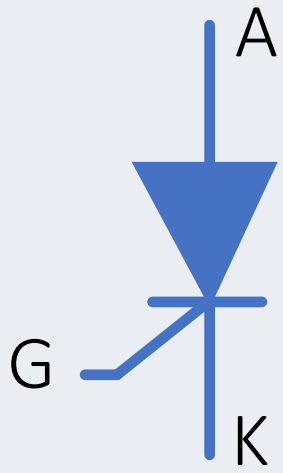

Thyristors


Semi-Controlled

Ideal Switches

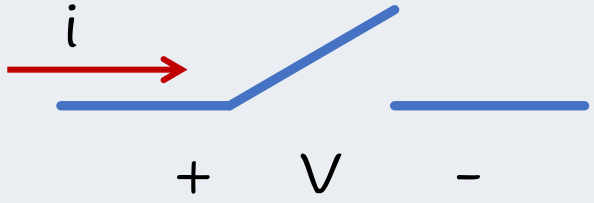

ON $V_{on} = 0$


$-\infty < i_{on} < \infty$

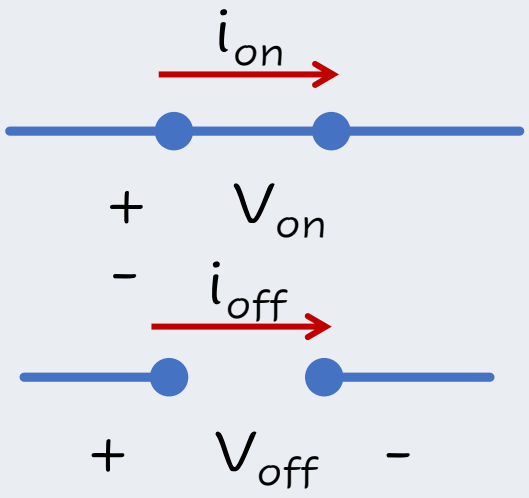


OFF $-\infty < V_{off} < \infty$

$i_{off} = 0$

Power Loss = Switching losses + Conduction Losses

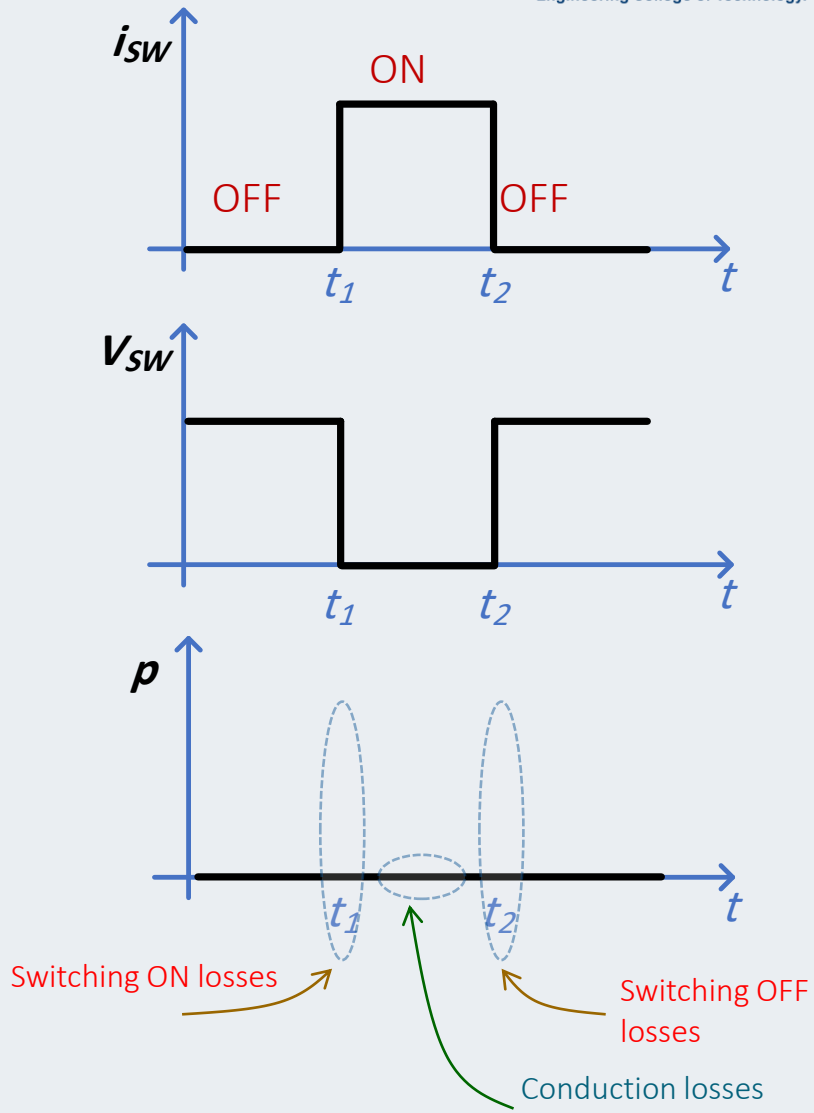


Practical Switches

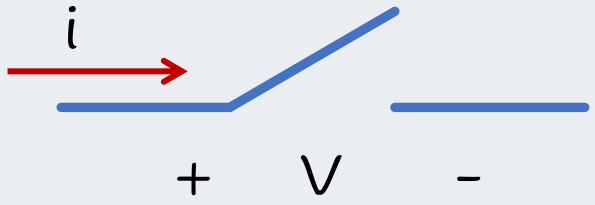

ON $V_{on} \neq 0$

$i_{on} < I_{max}$




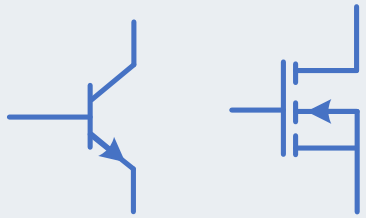


OFF $V_{off} < V_{max}$

$i_{off} \neq 0$

Power Loss = Switching losses + Conduction Losses

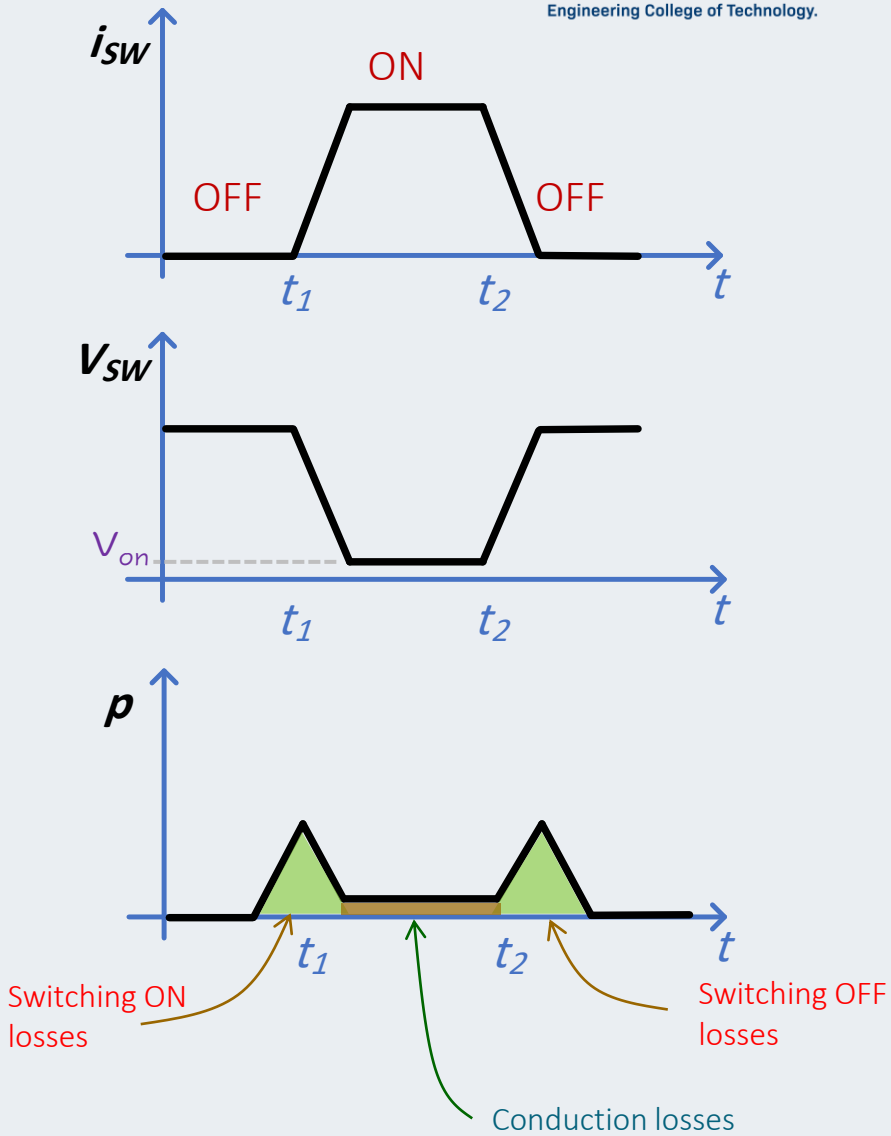


Practical Switches

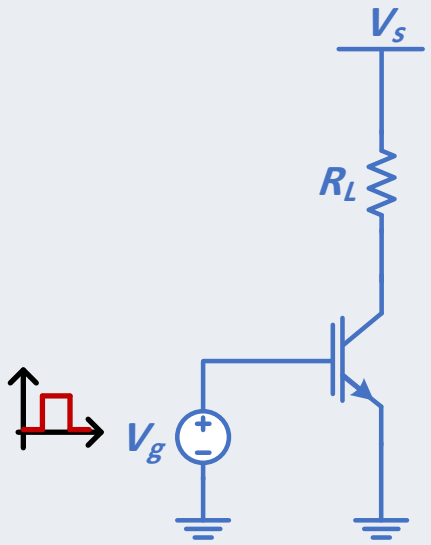


The delay time (t_d) corresponds mainly to the charging of the base-emitter junction diffusion capacitance or Vth and gain for the Mosfet

The current rise/fall time (t_r, t_f) is related to the effective base zone width and, as the base charge increases because of the base current, the collector current increases

t_s: The period after the cessation of positive base current until the transistor enters the linear region is termed storage or saturation time, because of overdriving.

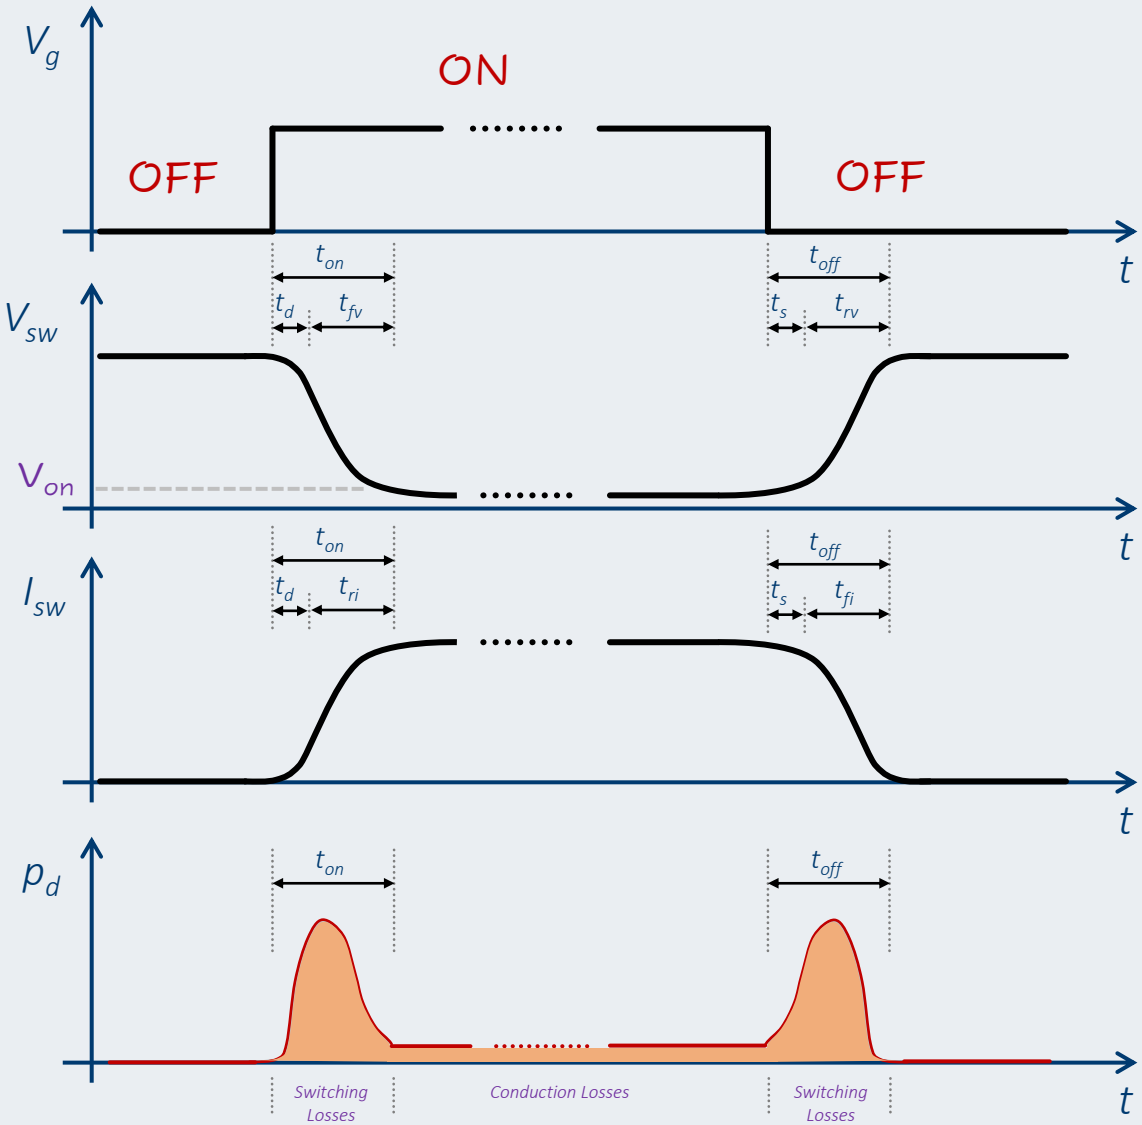

Power Diodes

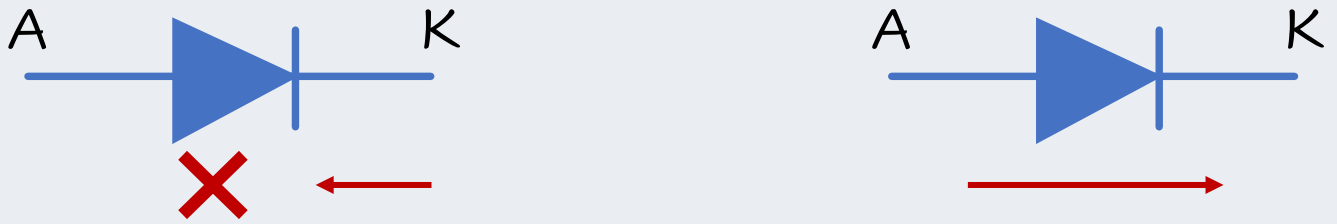


$V_A < V_K$

Reverse bias

$V_A > V_K$


Forward bias

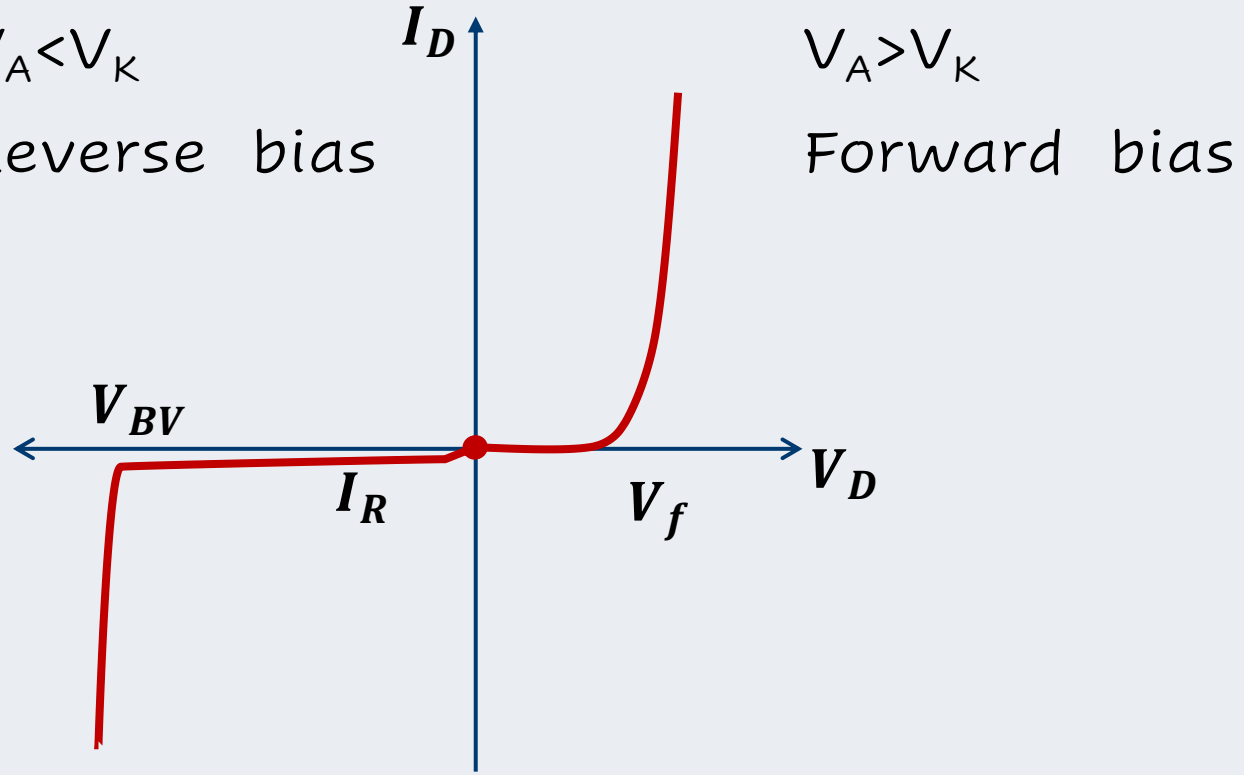

Diode-specific Electrical Characteristics

- *VF : Forward voltage
- *IR : Reverse current (leak current)
- *Ct : Capacitance
- *Trr : Reverse recovery time

Power Diodes

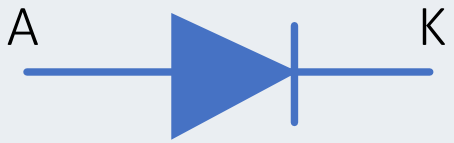


Signal




Low currents
Low Blocking voltages
Low power

Power

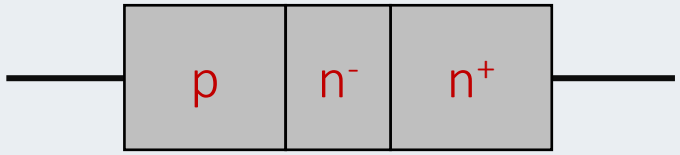

n- : Lightly dopped
n+ : Heavily dopped


Higher currents
Higher Blocking voltages
Higher power

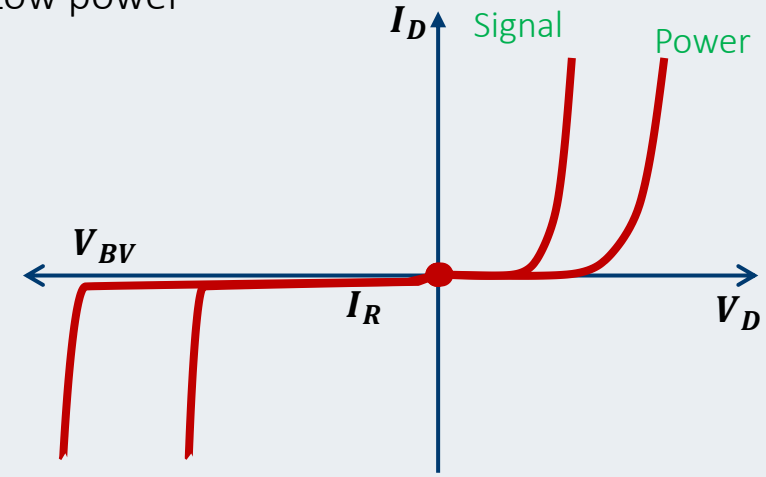


Higher forward voltage drop
Higher resistance in forward bias


PIN


where i stands for intrinsic

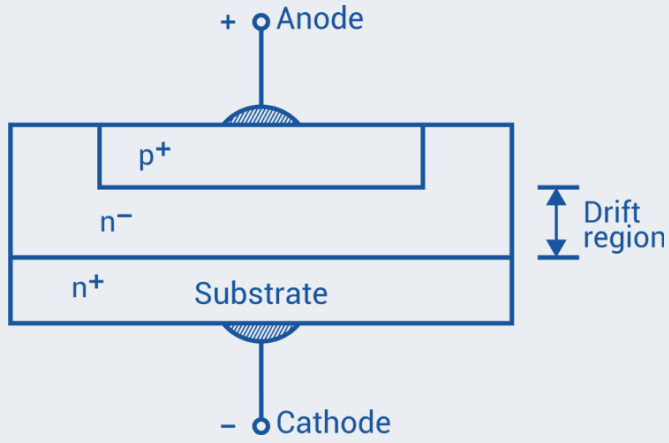


Power Diodes

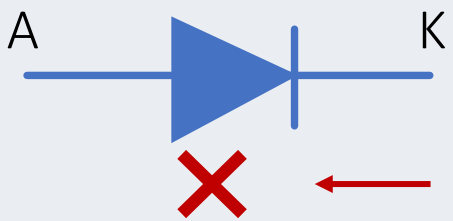

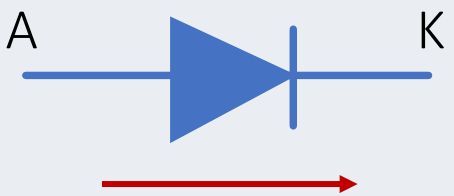

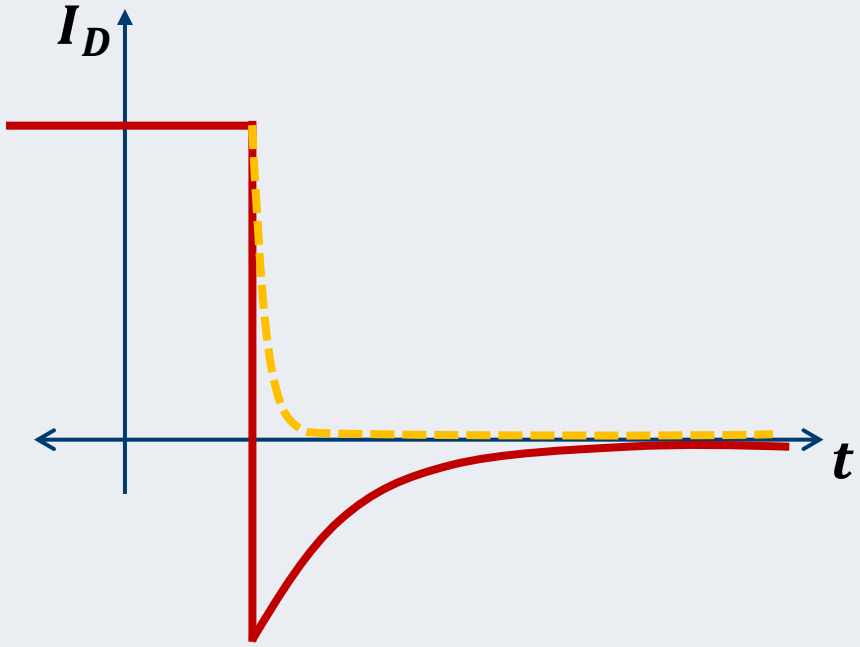


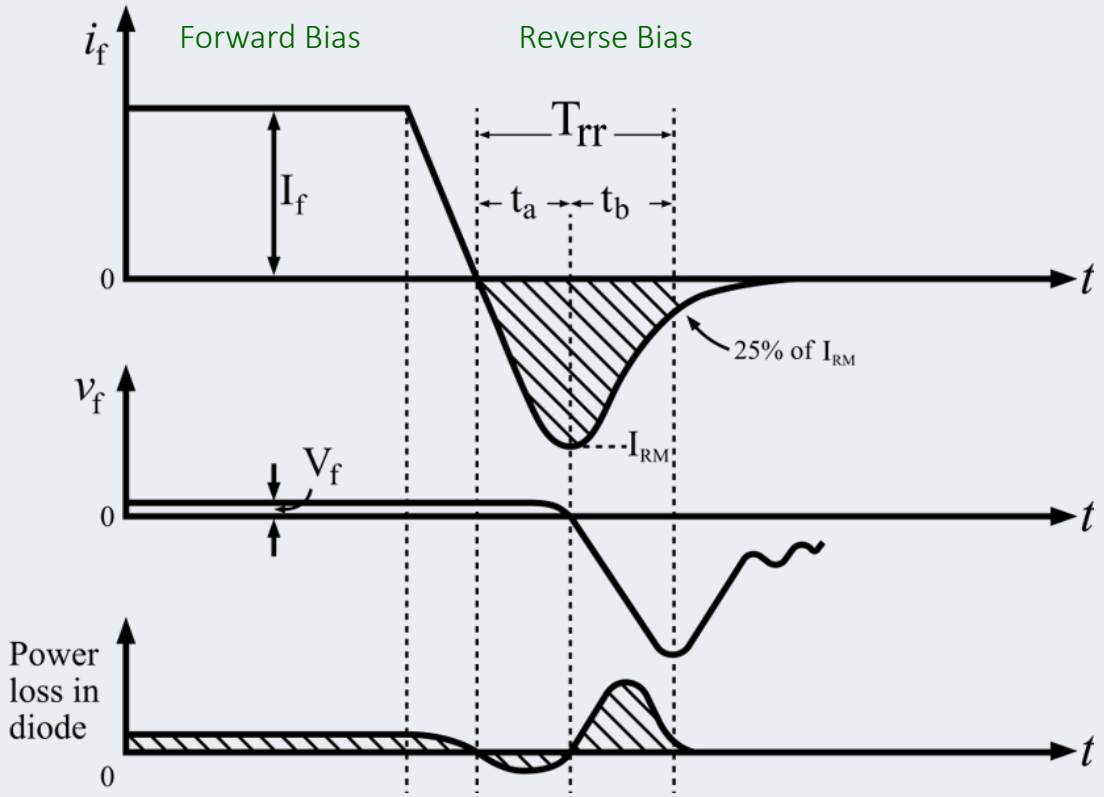

Left Figure indicates that SBDs have a lower V_F and higher I_R than the other three types.

Middle Figure indicates that t_{rr} is much shorter for SBDs and FRDs than for the other two diode types, and that if the I_R flowing during the time t_{rr} is large, losses are large.

Right Figure is the basic temperature characteristic for Si diodes. At higher temperatures, the V_F falls and the I_R increases.

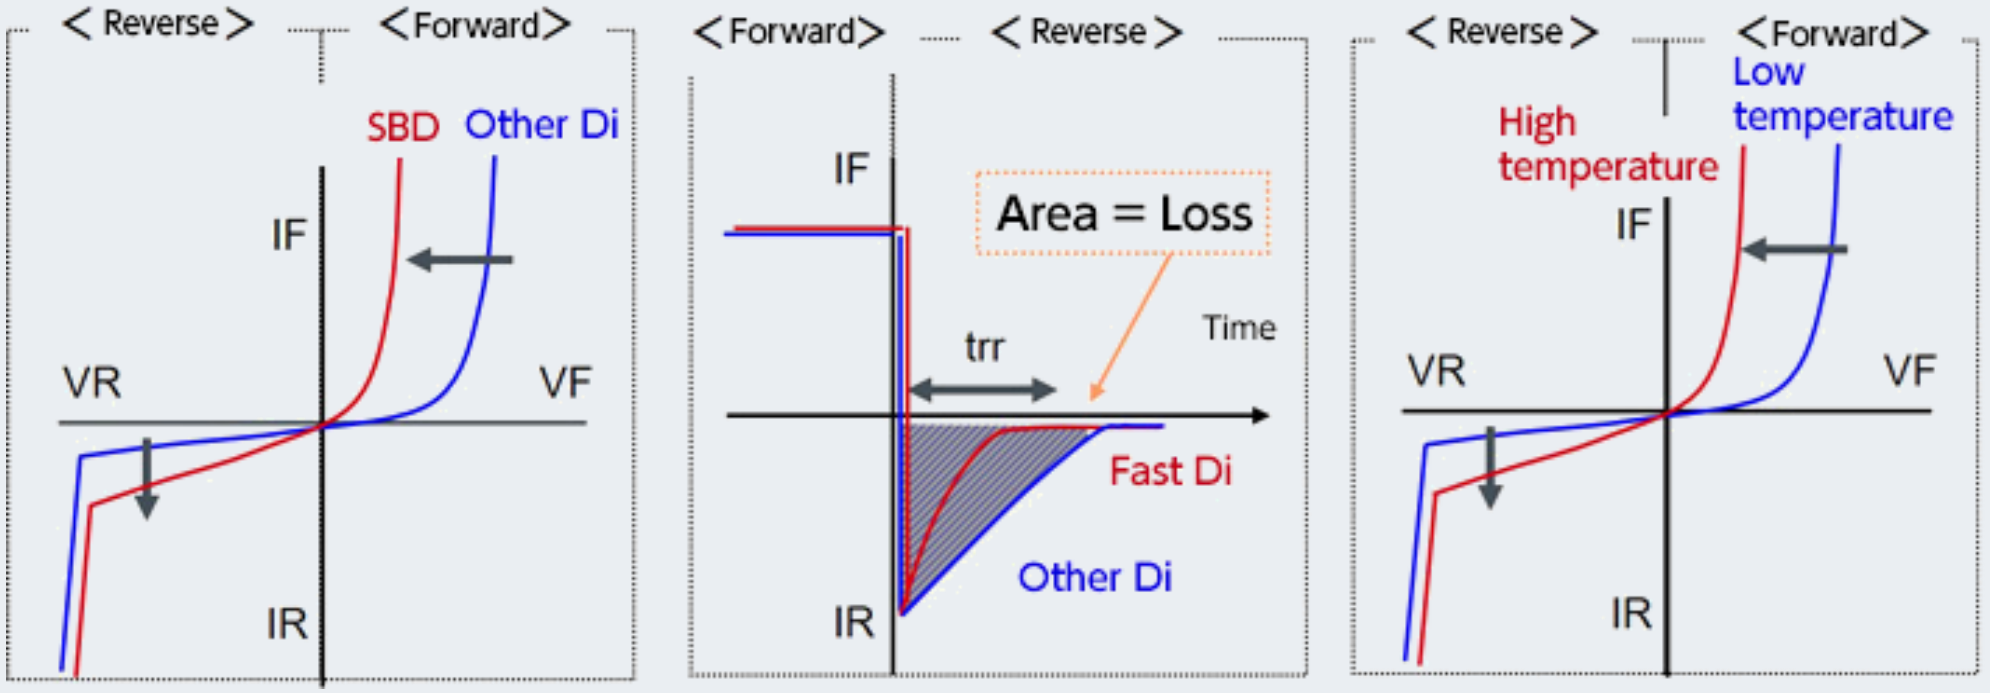


General Purpose Diodes	Fast Recovery Diodes	Schottky Diodes
Upto 5000V & 3500A	Upto 3000V and 1000A	Upto 100V and 300A
Reverse recovery time – High	Reverse recovery time – Low	Reverse recovery time – Extremely low.
$t_{rr} \approx 25\mu s$	$t_{rr} = 0.1\mu s$ to $5\mu s$	t_{rr} = a few nanoseconds
Turn off time - High	Turn off time - Low	Turn off time – Extremely low
Switching frequency – Low	Switching frequency – High	Switching frequency – Very high.
$V_F = 0.7V$ to $1.2V$	$V_F = 0.8V$ to $1.5V$	$V_F \approx 0.4V$ to $0.6V$


Wide Bandgap Semiconductors


Silicon Carbide (SiC) and Gallium Nitride (GaN)

Properties	Si	4H-SiC	GaN	Application
Crystal structure	Diamond	Hexagonal	Hexagonal	
Energy gap : E_G (eV)	1.12	3.26	3.5	high temp. operation,emission wavelength
Electrical mobility : μ_n (cm^2/Vs)	1400	900	1250	High frequency devices
Hole mobility : μ_p (cm^2/Vs)	600	100	200	
Breakdown field : E_B (V/cm) x10^6	0.3	3	3	Power devices
Thermal conductivity (W/cmK)	1.5	4.9	1.3	High heat dissipation
Saturated drift velocity : v_S (cm/s) x10^7	1	2.7	2.7	High frequency devices

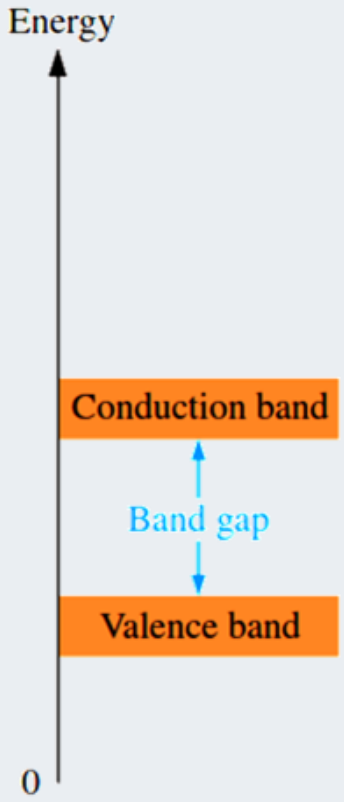

Wide Bandgap Semiconductors

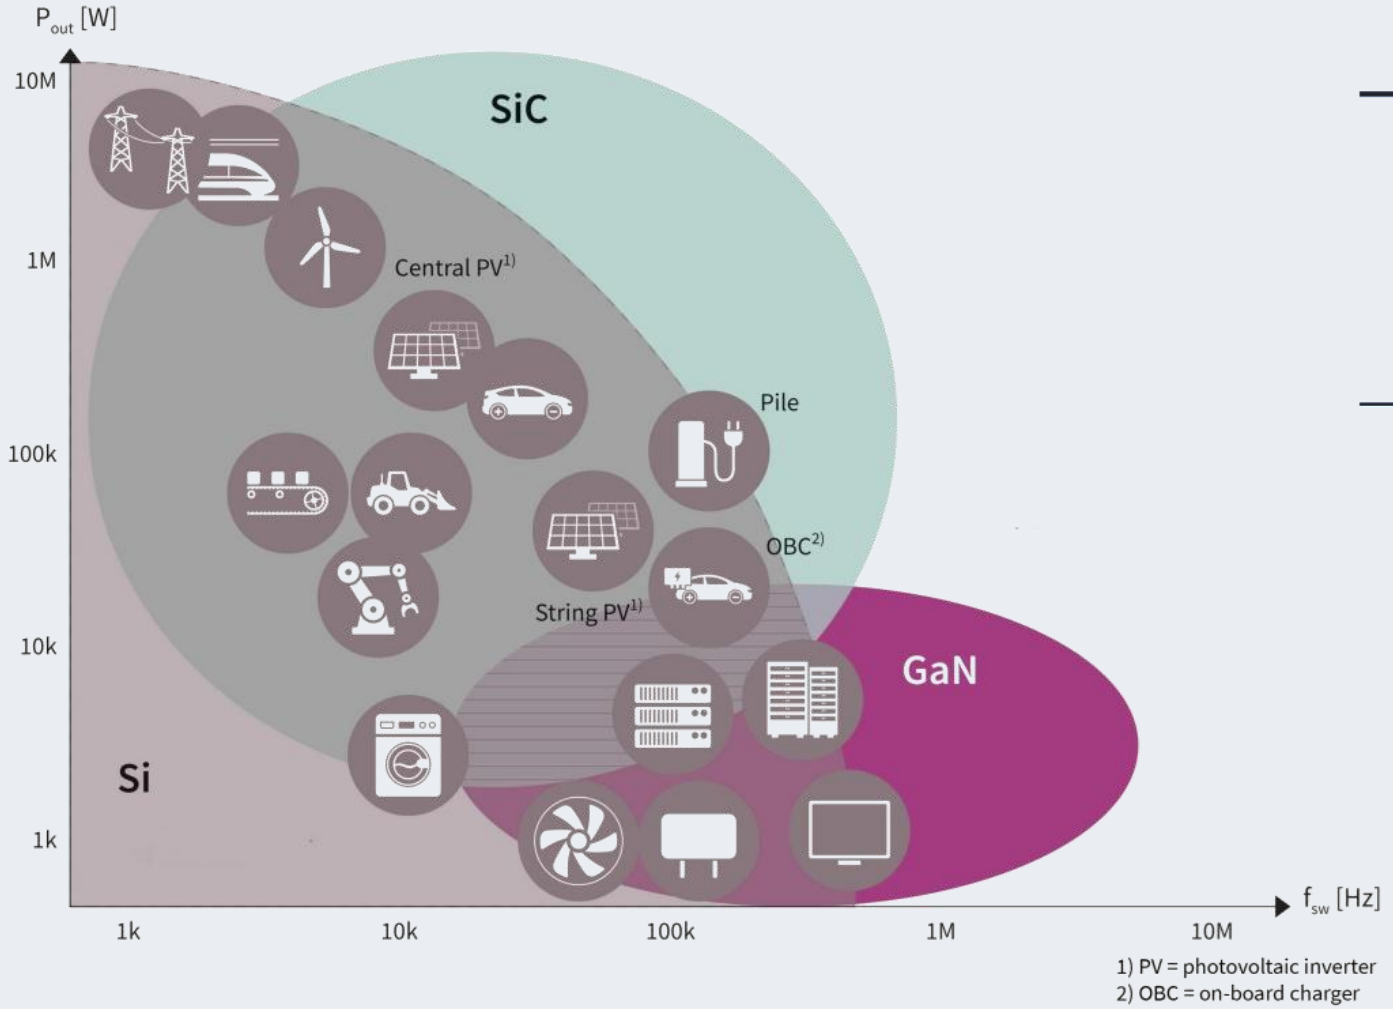

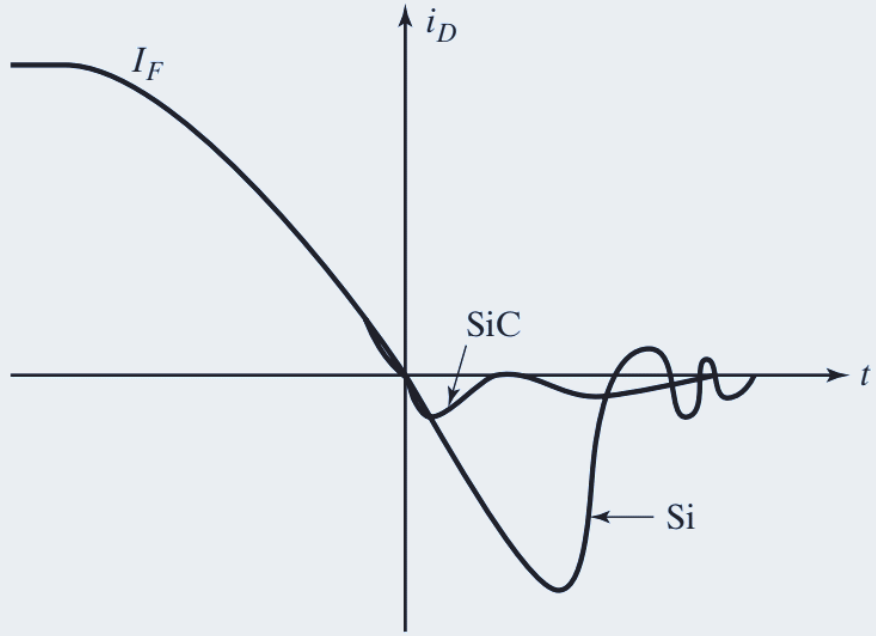

Thank You!

UKPRN: 10089771

Upcoming Programmes

Engineering College of Technology (ECT) *UK-Recognised Qualifications*	Start Date
Bachelor of Engineering (Honours) in Industrial Automation	September 2026, February 2027
Bachelor of Engineering (Honours) in Electrical Engineering	September 2026, February 2027
Master of Science (Power System Analysis and Renewable Integration)	October 2026, February 2027
Master of Science (Industrial Automation and Instrumentation Control)	October 2026, February 2027

Professional Certificates

Looking to upskill further? Check out the Professional Certificates!

These **3-month, non-accredited Professional Certificates of Competency**, delivered by ECT's affiliated institute, EIT, are designed by industry leaders and academics for technicians, technologists, engineers, and engineering professionals seeking to advance their expertise in a specific area. Featuring live, interactive webinars led by expert instructors with technical know-how, along with dedicated learning support, these courses are the perfect complement to an existing degree, qualification, or relevant work experience.

Find out more!

Q&A



Contact Us:

Website
www.ect.ac.uk

Courses
https://www.ect.ac.uk/programmes/

Head Office
Whittle Way, Stevenage SG1 2FS,
United Kingdom

Phone
Inside UK: 0203 582 1389
Outside UK: +44 203 582 1389

UKPRN: 10089771